1 of 2

GENERAC[®]

XC6500E

XC SERIES Commercial Portable Generators

Features

- X Frame Fully Wrapped, Heavy Duty 12 Gauge Steel Tube provides rugged durability and protects the generator and fuel tank from damage.
- Steel Lifting Pocket designed for easier lifting and transportation on jobsites by crane or forklift.
- Generac G-Force™ Engine features Best-in-Class power with full pressure lubrication and is optimized for generator use.
- Impact Resistant Fuel Tank Design recessed tank edges reduce damage when transported by forklift.
- · Full Panel GFCI Protection OSHA compliant with covered outlets.
- Easy Access To All Routine Maintenance Areas including filters and spark plugs; no need to remove fuel tank or side panels.
- Never Flat Wheels With Steel Hubs makes movement around the jobsite easy and efficient.
- Protected Axle integrated into frame, shields from impact during transport.
- · Welded Steel Feet reinforced for superior durability.
- Fold-Down Locking Handles features one-handed locking mechanism for easy storage.
- Engraving Plate allows unit to be tagged / cataloged for use in contractor and rental fleets.
- TruePower™ Technology provides clean, smooth operation of sensitive electronics, tools, and appliances.


Model 6825-0 UPC:696471061284 (EPA/49-State/CSA-Canada)



Photograph may not represent actual content.

AC Rated Output Running Watts 6500 AC Maximum Output Starting Watts 8125

49-State/CSA Control Panel

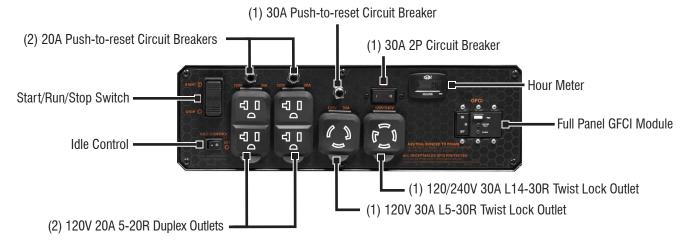

XC6500E

Specifications

Product Series Model (Configuration) AC Rated Output Running Watts AC Maximum Output Starting Watts Rated AC Voltage Rated 120/240 VAC Rated 120/240 VAC Amperage Engine Displacement Engine Type Engine RPM Recommended Oil Lubrication Method Automatic Voltage Regulation (AVR) Total Harmonic Distortion Choke Location Fuel Shut Off Starting Method Battery Battery Type Low Oil Shutdown Neutral Bonded to Ground Start Switch Type Start/Run/Stop (EPA/49-State/CSA-Canada) 6825-0 ((EPA/49-State/CSA-Canada) 8125 8125 8125 8125 8125 8125 8125 8126 946 946 947 948 948 948 948 948 948 948		
AC Rated Output Running Watts AC Maximum Output Starting Watts Rated AC Voltage Rated AC Frequency Rated 120/240 VAC Amperage Engine Displacement Engine Type Engine RPM Recommended Oil Lubrication Method Automatic Voltage Regulation (AVR) Total Harmonic Distortion Choke Location Fuel Shut Off Starting Method Battery Battery Battery Type Low Oil Shutdown Neutral Bonded to Ground (EPA/49-State/CSA-Canada) 6500 R12 R120/240 VAC R212/27.0 Engine Type Generac G-Force Generac G-Force Force Force Force R210/240 VAC R260 Hz R260 Hz R260 Hz R260 Generac G-Force R260 Hz R260 Generac G-Force R260 Hz R260 Generac G-Force R260 Hz R260 Generac G-Force R260 Hz R260 Generac G-Force R260 Generac G-Force R260 Generac G-Force R260 Hz R260 H	Product Series	XC6500E
AC Rated Output Running Watts AC Maximum Output Starting Watts Rated AC Voltage Rated AC Voltage Rated AC Frequency Rated 120/240 VAC Amperage Engine Displacement Engine Type Engine RPM Recommended Oil Lubrication Method Automatic Voltage Regulation (AVR) Total Harmonic Distortion Choke Location Fuel Shut Off Starting Method Battery Battery Battery Type Low Oil Shutdown Neutral Bonded to Ground Reson Reson Reson Recommended Oil Lubrication Method Oil Pump Automatic Voltage Regulation (AVR) Total Harmonic Distortion Choke Location Fuel Shut Off Con Fuel Tank Starting Method Recommended Starting Method Fuel Shut Off Con Fuel Tank Starting Method Fuel Shut Off Con Fuel Tank Starting Method Fuel Shutdown Fuel S	Model (Configuration)	6825-0
AC Maximum Output Starting Watts Rated AC Voltage Rated AC Frequency Rated 120/240 VAC Amperage Engine Displacement Engine Type Engine RPM Recommended Oil Lubrication Method Automatic Voltage Regulation (AVR) Total Harmonic Distortion Choke Location Fuel Shut Off Starting Method Battery Battery Battery Type Low Oil Shutdown Neutral Bonded to Ground Recommended Oil Lubrication Method Automatic Voltage Regulation (AVR) Total Harmonic Distortion Starting Method Battery Low Oil Shutdown Neutral Bonded to Ground Recommended Oil Lubrication Agency Generac G-Force Generac G-Force Generac G-Force In Undeacc In Und		(EPA/49-State/CSA-Canada)
Rated AC Voltage Rated AC Frequency Rated 120/240 VAC Amperage Engine Displacement Engine Type Engine RPM Recommended Oil Lubrication Method Automatic Voltage Regulation (AVR) Total Harmonic Distortion Choke Location Fuel Shut Off Starting Method Electric/Recoil Pull Start Battery Battery Type Low Oil Shutdown Neutral Bonded to Ground 120/240 VAC 120/	AC Rated Output Running Watts	6500
Rated AC Frequency Rated 120/240 VAC Amperage Engine Displacement Engine Type Engine RPM Recommended Oil Lubrication Method Automatic Voltage Regulation (AVR) Total Harmonic Distortion Choke Location Fuel Shut Off Starting Method Electric/Recoil Pull Start Battery Battery Type Low Oil Shutdown Neutral Bonded to Ground 60 Hz 60 Hz 61 H2 62 H2 62 H2 62 H2 62 H2 62 H2 63 H2 64 H2 65 H2 66 Hz 67 H2 67	AC Maximum Output Starting Watts	8125
Rated 120/240 VAC Amperage Engine Displacement Engine Type Engine RPM 3600 Recommended Oil Lubrication Method Automatic Voltage Regulation (AVR) Total Harmonic Distortion Choke Location Fuel Shut Off Starting Method Electric/Recoil Pull Start Battery Battery Type Low Oil Shutdown Neutral Bonded to Ground Senerac G-Force Generac G-Force 1000 10W-30 / SAE 30 10W-30	Rated AC Voltage	120/240 VAC
Engine Displacement Engine Type Engine RPM Recommended Oil Lubrication Method Automatic Voltage Regulation (AVR) Total Harmonic Distortion Choke Location Fuel Shut Off Starting Method Battery Battery Dow Oil Shutdown Neutral Bonded to Ground 426cc Generac G-Force Generac G-Force Generac G-Force 4360 (Safe on Sale 30 (Safe sor Sensitive Electornics) On Engine Fuel Shut Off On Fuel Tank Electric/Recoil Pull Start Battery Included Battery Type Low Pressure Neutral Bonded to Ground	Rated AC Frequency	60 Hz
Engine Type Engine RPM 3600 Recommended Oil Lubrication Method Automatic Voltage Regulation (AVR) Total Harmonic Distortion Choke Location Fuel Shut Off Starting Method Electric/Recoil Pull Start Battery Battery Type Low Oil Shutdown Neutral Bonded to Ground Generac G-Force Generac Genore Touch Generac Generac General Gene	Rated 120/240 VAC Amperage	54.2/27.0
Engine RPM 3600 Recommended Oil 10W-30 / SAE 30 Lubrication Method Oil Pump Automatic Voltage Regulation (AVR) Yes Total Harmonic Distortion <5%	Engine Displacement	426cc
Recommended Oil Lubrication Method Oil Pump Automatic Voltage Regulation (AVR) Total Harmonic Distortion Choke Location Fuel Shut Off Starting Method Battery Battery Battery Ves 10W-30 / SAE 30 Oil Pump Ves (Safe for Sensitive Electornics) On Engine On Fuel Tank Electric/Recoil Pull Start Battery Included Battery Type Low Oil Shutdown Neutral Bonded to Ground Ves	Engine Type	Generac G-Force
Lubrication Method Automatic Voltage Regulation (AVR) Total Harmonic Distortion Choke Location Fuel Shut Off Starting Method Battery Battery Type Low Oil Shutdown Neutral Bonded to Ground Oil Pump (Safe for Sensitive Electornics) On Engine On Fuel Tank Electric/Recoil Pull Start Included Low Pressure Neutral Bonded to Ground Yes	Engine RPM	3600
Automatic Voltage Regulation (AVR) Total Harmonic Distortion Choke Location Fuel Shut Off Starting Method Battery Battery Battery Type Low Oil Shutdown Neutral Bonded to Ground Yes Yes (Safe for Sensitive Electornics) On Engine On Fuel Tank Electric/Recoil Pull Start Included Low Pressure Yes	Recommended Oil	10W-30 / SAE 30
Total Harmonic Distortion <5% (Safe for Sensitive Electornics) Choke Location Fuel Shut Off Starting Method Battery Battery Battery Type Low Oil Shutdown Neutral Bonded to Ground CSM (Safe for Sensitive Electornics) On Engine On Fuel Tank Electric/Recoil Pull Start Included Battery Type Low Pressure Yes	Lubrication Method	Oil Pump
(Safe for Sensitive Electornics) Choke Location On Engine Fuel Shut Off On Fuel Tank Starting Method Electric/Recoil Pull Start Battery Included Battery Type Low Oil Shutdown Neutral Bonded to Ground (Safe for Sensitive Electornics) Included Low Pressure Yes	Automatic Voltage Regulation (AVR)	Yes
Choke Location Fuel Shut Off On Fuel Tank Starting Method Battery Battery Type Low Oil Shutdown Neutral Bonded to Ground On Engine Con Fuel Tank Electric/Recoil Pull Start Included 12VDC Low Pressure Yes	Total Harmonic Distortion	<5%
Fuel Shut Off On Fuel Tank Starting Method Electric/Recoil Pull Start Battery Included Battery Type 12VDC Low Oil Shutdown Low Pressure Neutral Bonded to Ground Yes		(Safe for Sensitive Electornics)
Starting Method Electric/Recoil Pull Start Battery Battery Type 12VDC Low Oil Shutdown Low Pressure Neutral Bonded to Ground Yes	Choke Location	On Engine
Battery Included Battery Type 12VDC Low Oil Shutdown Low Pressure Neutral Bonded to Ground Yes	Fuel Shut Off	On Fuel Tank
Battery Type 12VDC Low Oil Shutdown Low Pressure Neutral Bonded to Ground Yes	Starting Method	Electric/Recoil Pull Start
Low Oil Shutdown Low Pressure Neutral Bonded to Ground Yes	Battery	Included
Neutral Bonded to Ground Yes	Battery Type	12VDC
	Low Oil Shutdown	Low Pressure
Start Switch Type Start/Run/Stop	Neutral Bonded to Ground	Yes
	Start Switch Type	Start/Run/Stop

On Control Panel
Included
Built-in Tank
8.5 (32)
14
Dual Folding/Locking
Yes
10" Solid with Steel Hub
Included
2 Year Limited
3 Year Limited

Dimensions and Weights

Model	6825-0
Length in (mm)	34.3 (872)
Width in (mm)	28.6 (727)
Height in (mm)	32.5 (826)
Extended Length in (mm)	46.8 (1188)
Carton Length in (mm)	38.8 (985)
Carton Width in (mm)	23.5 (597)
Carton Height in (mm)	30 (762)
Unit Weight lbs (kg)	257 (117)
Shipping Weight lbs (kg)	277 (126)

