



STANDBY GENERATORS

17-19kW¹ 3-PHASE STANDBY GENERATORS



FEATURES AND BENEFITS

Reliable Engine Power

Our standby generators are powered by commercial-grade Vanguard™ engines that are design-engineered to dependably take on the most demanding jobs.

Simple Maintenance

More service access to the engine and alternator plus a user-friendly control panel make repairs easier and less costly for home and business owners.

4-Year Limited Parts and Labor Warranty²

At Briggs & Stratton®, we stand behind our warranty and make it easy for our customers to work with us.

Durable Enclosure

Rust-resistant, galvanized steel enclosures are made from the same materials used in the automotive industry and feature an advanced powder coat paint process, resulting in years of protection against chips and abrasions.

Quick Response

Automatically powers your home or business in seconds after sensing a power outage.

POWER YOU CAN DEPEND ON.

Help eliminate your customer's losses from power outages. Supported by a comprehensive commercial warranty, your customers can be confident that when the power goes out, it will perform.

Designed to offer you more options for homes or businesses with increasing electrical demands, three phase generators are part of a complete line of Standby Generators.

To learn more, visit www.powernow.com.

GENERATOR SET RATINGS

MODEL NUMBER	LP GAS		NATURAL GAS		VOLTAGE	POWER FACTOR	PHASE	HZ	BREAKER
	KW ¹	AMPS	KW ¹	AMPS					
040415	17	60	15.3	53	208/120wYe	.8	3	60	70
040422	19	58	17.1	51	240 Delta	.8	3	60	70

WHY CHOOSE BRIGGS & STRATTON?

Briggs & Stratton offers a full line of automatic Standby Generators from 8 to 60kW for protection during a power outage.

TRUSTED BRAND

Briggs & Stratton has been providing reliable engine power for over 100 years. It's a name that your customers know and trust. Customers are confident that Briggs & Stratton products have the power to perform for many years.

RELIABLE PRODUCTS

Field-driven design and extensive testing, from prototype to production, help ensure that customers are receiving one of the best standby generators. Trust the proven power experts at Briggs & Stratton for complete peace of mind.

SUPPORT EVERY STEP OF THE WAY

Need help? Just call 800-759-2744. Our technical support team is trained to answer questions on our generators, transfer switches and accessories.

Ready to place an order? Our team is ready to help. Call 1-87-RELY-ON-US.

CONTROLLER FEATURES

Hour Meter	Yes
Weekly Exerciser	Yes



CONTROLLER FAULT CODES

- Low Oil Shutdown
- Engine Does Not Start
- Low Frequency
- Engine Overspeed
- Low Voltage
- Low Battery
- Voltage
- Engine Temp High
- Transfer Switch Fault

ENGINE SPECIFICATIONS

	17KW ¹	19KW ¹
Engine Model	Briggs & Stratton Vanguard™	
Engine Model Type Trim Number	613275-0118-B1	
Engine Type	V-Twin, 4-Cycle	
Engine Cylinder Configuration	OHV	
Number of Cylinders	2	
Engine Speed	3600 RPM	
Displacement (cu.in./cc)	60.6/993	
Bore (in)	3.37	
Stroke (in)	3.41	
Engine Weight (lbs)	125	
Engine Fuel	Liquid Propane/Natural Gas	
Induction System	Naturally Aspirated	
Starter	Industrial Electric Solenoid Shift	
Valves	OHV with Hardened Seats	
Air Filter Type	Dry Cartridge, UL Approved	
Governor Type	Electronic	
Frequency Regulation	E-governing control	
Start Type	Automatic	
Lubrication System	Full Pressure	
Recommended Oil	5W30 Full Synthetic	
Oil Capacity (oz.)	78	
Oil Cooler	Yes	
Low Oil Pressure Sensor	Yes	
Cooling System Type	Air-cooled	

LP GAS FUEL CONSUMPTION¹

	17KW ¹	19KW ¹
100% Load (ft ³ /hr / gal/hr)	125/3.42	130/3.55
50% Load (ft ³ /hr / gal/hr)	77/2.10	82/2.24

NG FUEL CONSUMPTION¹

	17KW ¹	19KW ¹
100% Load (ft ³ /hr)	257	260
50% Load (ft ³ /hr)	160	172

SOUND RATING AT 7 METERS, PER ISO 3744

5kW¹ Load (dBA) 69.5

CERTIFICATIONS

UL Yes
cUL Yes

LIMITED WARRANTY²

Warranty (Parts/Labor & Travel) 4 Years

ALTERNATOR SPECIFICATIONS

Manufacturer Briggs & Stratton
Type Self-Excited, Rotating Field
Brushed/Brushless Alternator Brushed
Voltage Regulation Automatic
Number of Poles 2
Insulation Class F

WEIGHT AND DIMENSIONS

17KW¹/19KW¹

Assembled Weight (lbs) 500
Assembled Dimensions (L x D x H) 48" x 34" x 31"
Packaged Weight (lbs) 580
Packaged Dimensions (L x D x H) 72" x 36" x 39"


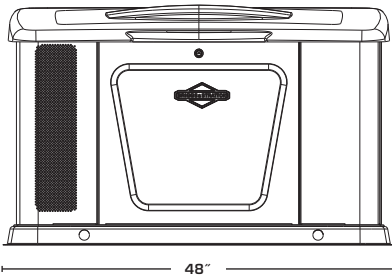


Illustration may vary slightly from actual unit

Not for Prime Power or use where standby systems are legally required, for serious life safety or health hazards, or where lack of power hampers rescue of fire-fighting operations.

¹ This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-04 (motors and generators)

² Warranty details available at briggsandstratton.com

³ Fuel consumption rates are estimated based on normal operating conditions. Generator operation may be greatly affected by elevation and the cycling operation of multiple electrical appliances – fuel flow rates may vary depending on these factors.

Briggs & Stratton Corp. reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation.

BRIGGS&STRATTON

OTHER FEATURES

Enclosure Material Galvanneal with Corrosion Resistant Paint
Overcrank Protection Yes
Engine Warm-Up (Time) 20s or 50s ATS Jumper Controlled
Engine Cool Down 1 min.
Response Time 26s or 56s ATS Jumper Controlled
2 Wire Sensing Yes
Continuous Battery Charging Yes

Battery

12V, Not included. BCI size 26, battery min 540 CCA; Below 0°F: BCI size 75 battery, min 630 CCA

INCLUDED EXTRAS

- hour meter
- battery charger
- oil

TRANSFER SWITCHES

GE ZENITH TRANSFER SWITCHES

Advanced, high-speed switching for today's most critical loads, GE Zenith transfer switches are highly reliable for essential business applications. GE Zenith Transfer Switches are available in a variety of ampacities and configurations.

Receive a 2 year limited warranty² when you purchase a GE Zenith Transfer Switch from Briggs & Stratton.

AVAILABLE ACCESSORIES

MAINTENANCE KIT (6036)

Maintenance kits help you complete scheduled and preventative maintenance on your standby generator. Designed specifically for your generator's needs, each maintenance kit contains oil and air filters, an oil funnel, oil and spark plugs.

COLD WEATHER KIT (6231)

Help ensure smooth operation in the winter months. The thermostatically controlled battery warmer and oil heater activate as the temperature drops helping the standby generator operate in colder temperatures. Using this kit, the 17kW¹/19kW¹ home generators are tested to start as low as -25° F. Kit includes two oil warmers and one battery warmer.

BASIC WIRELESS MONITOR (6229)

Easy, trouble-free monitoring is a reality with the new Briggs & Stratton® Basic Wireless Monitor. Place the wireless monitor in your home and know your generator is working without ever having to go outside.

INFOHUB™

Using your computer, tablet or smart phone, standby generator owners can instantly check their generator's system status from home or away. The cellular-based system sends generator status alerts or maintenance needs to your personal email, phone or servicing dealer's phone.

POWER PRODUCTS GROUP, LLC
POST OFFICE BOX 702
MILWAUKEE, WI 53201 USA
Copyright ©2013. All rights reserved. HGS000510TP-9/13



THE POWER WITHIN™