




**The KOHLER Advantage**

- **Built to Last Since 1920**  
For over 90 years, hospitals, airports and military bases around the world have depended on KOHLER generators.
- **Premium Warranty**  
You get our premium 3-year limited warranty backed by a network of more than 10,000 dealers.
- **Custom Kits**  
Legs, handles, wheels, lifting kits - whatever you want, any way you want it.
- **Free Loaner Program\***  
If your KOHLER generator ever goes down, just swing by one of our select dealers. We'll provide a free loaner unit for warranty repairs exceeding 24 hours.

**Standard Features**

- **Easy Refills**  
Accu-Fill™ feature provides safe, easy refilling – and less spilling – with angled fuel inlet.
- **Extra Engine Protection**  
Oil Sentry™ automatically shuts engine down in low-oil conditions.
- **OSHA-Ready**  
When properly used, it's equipped to meet OSHA requirements.
- **Easy Reminders**  
Maintenance Minder displays hours of run time and lights up to remind you of oil/spark plug/filter changes.
- **GCFI Outlets**  
Ground-fault circuit interrupter detects unbalanced electrical current and safely shuts down power.
- **Safeguards Your Investment**  
Automatic voltage regulator keeps voltage consistent to avoid surges or other damage.
- **Fuel Saver\*\***  
Auto-idle feature automatically set the engine to idle to save fuel.

**Control Panel**

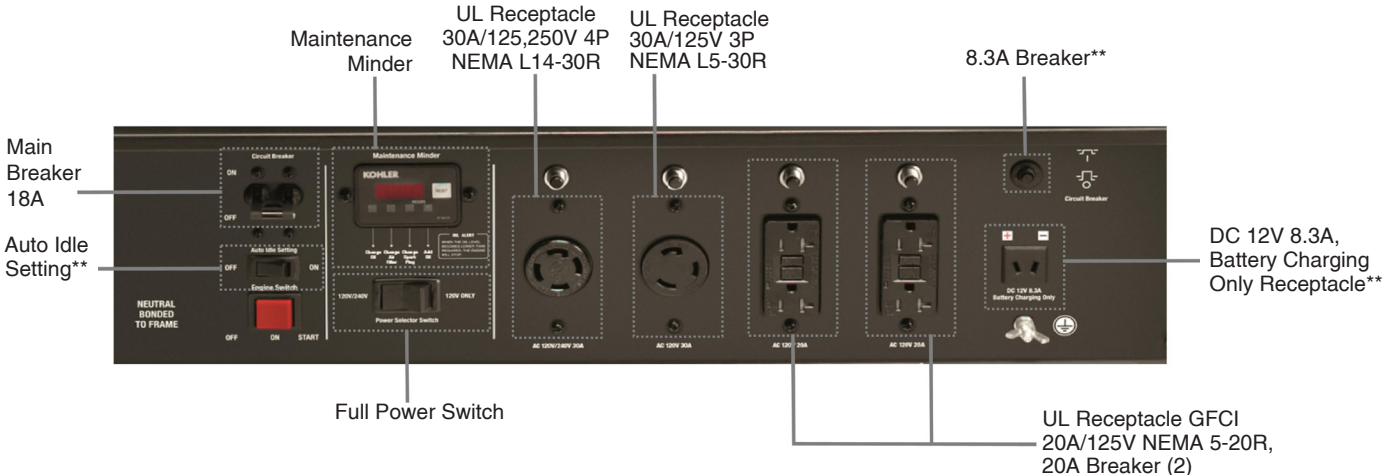

\* At participating dealers, based on availability.  
\*\* Featured only in model PRO5.2E

## Specifications


Model Name	PRO5.2	PRO5.2E
Model spec	PA-PRO52-3002 PA-PRO52-2002 PA-PRO52-1001	PA-PRO52E-3002 PA-PRO52E-2002 PA-PRO52E-1001
Compliance	3002 (EPA/CARB) 2002 (EPA) 1001 (EPA/CSA)	
AC rated output (running watts)	4,500	
AC maximum output (motor starting watts)	5,200	
AC voltage	120/240	
AC frequency (Hz)	57.5-63	
Total Harmonic Distortion	≤ 5%	
Rated VAC amperage	37.5/18.75	
Max rated amperage	43.3/21.7	
Engine displacement	429cc	
Fuel type	Gasoline	
Engine RPM	3450-3750	
Recommended oil	SAE30	
Automatic voltage regulation	Yes	
Choke location	Manual on engine	
Fuel shut off	In tank w/filter	
Starting method	Recoil only	Recoil & Electric
Low oil shutdown method	Low level	
Neutral	Neutral Bonded to Frame	
Start switch type	Toggle Type Off-On (Red)	Toggle Type Off-On-Start (Red)
Switch location	On control panel	
Fuel gauge	Yes	
Fuel tank capacity	8 gal/30 liters	
Run time @ 50% (hours)	18	
Warranty - Residential	3 years	
Warranty - Commercial	3 years	

## Available Options

- Wheel Kit (Ø10 by 3 inch)
- Leg Kit
- Wheelbarrow Handle Kit
- Auto-Locking Hand Truck Handle Kit
- Lifting Kit
- Extension Cord Management Kit
- Isolator Kit

## Generator Set Dimensions and Weights

A mm (in.):	747 (29.4)	Carton Length mm (in.):	777 (30.6)
B mm (in.):	544 (21.4)	Carton Width mm (in.):	572 (22.5)
C mm (in.):	566 (22.3)	Carton Height mm (in.):	599 (23.6)
D mm (in.):	1219 (48)	Shipping Weight lbs (kg)	
E mm (in.):	762 (30)	PRO5.2:	190 (86)
F mm (in.):	114 (4.5)	PRO5.2E:	214 (97)
G mm (in.):	140 (5.5)		
Unit Weight lbs (kg):			
PRO 5.2 :	180 (82)		
PRO 5.2E:	201 (91)		

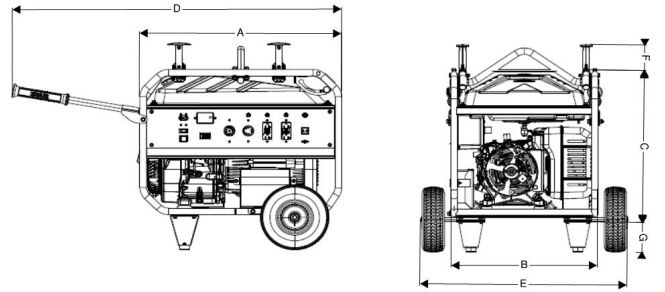

NOTE: Dimensions are provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

**DISTRIBUTED BY:**



© 2014 by Kohler Co. All rights reserved.