




**EPA-Certified for Stationary
Emergency Applications**

Ratings Range

| | | |
|-----------------|------------|--------------|
| | | 60 Hz |
| Standby: | kW | 91-125 |
| | kVA | 91-156 |

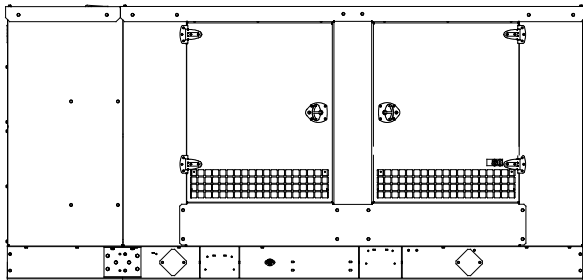

Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- The 60 Hz generator set offers a UL 2200 listing.
- CSA approval is available.
- The 60 Hz generator set meets NFPA 110, Level 1, when equipped with the necessary accessories and installed per NFPA standards.
- The generator set accepts rated load in one step.
- A one-year limited warranty covers all generator set systems and components. Two- and five-year extended limited warranties are also available.
- Alternator features:
 - The unique Fast-Response® X excitation system delivers excellent voltage response and short-circuit capability using a rare-earth, permanent magnet (PM)-excited alternator.
 - The brushless, rotating-field alternator has broadrange reconnectability.
- Other features:
 - Kohler® APM402 controller. See controller features on page 3.
 - The electronic, isochronous governor incorporates an integrated drive-by-wire throttle body actuator delivering precise frequency regulation.
- Quick-ship (QS) models with selected features and a five-year basic limited warranty are available. See your Kohler distributor for details.

Generator Set Ratings

| Alternator | Voltage | Ph | Hz | Natural Gas 130°C Rise Standby Rating | | LP Gas 130°C Rise Standby Rating | |
|------------|---------|----|----|---|------|--|------|
| | | | | kW/kVA | Amps | kW/kVA | Amps |
| 4R12X | 120/208 | 3 | 60 | 120/150 | 417 | 105/131 | 364 |
| | 127/220 | 3 | 60 | 125/156 | 410 | 105/131 | 344 |
| | 120/240 | 3 | 60 | 120/150 | 361 | 105/131 | 316 |
| | 120/240 | 1 | 60 | 91/91 | 380 | 91/91 | 380 |
| | 139/240 | 3 | 60 | 125/156 | 376 | 105/131 | 316 |
| | 220/380 | 3 | 60 | 110/138 | 210 | 105/131 | 200 |
| | 277/480 | 3 | 60 | 125/156 | 188 | 105/131 | 158 |
| 4R13X | 120/208 | 3 | 60 | 125/156 | 434 | 105/131 | 364 |
| | 127/220 | 3 | 60 | 125/156 | 410 | 105/131 | 344 |
| | 120/240 | 3 | 60 | 125/156 | 376 | 105/131 | 316 |
| | 120/240 | 1 | 60 | 105/105 | 438 | 100/100 | 417 |
| | 139/240 | 3 | 60 | 125/156 | 376 | 105/131 | 316 |
| | 220/380 | 3 | 60 | 120/150 | 228 | 105/131 | 200 |
| 4T13X | 277/480 | 3 | 60 | 125/156 | 188 | 105/131 | 158 |
| | 120/240 | 1 | 60 | 125/125 | 521 | 105/105 | 438 |

RATINGS: All three-phase units are rated at 0.8 power factor. All single-phase units are rated at 1.0 power factor. **Standby Ratings:** The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. Ratings are in accordance with ISO-8528-1 and ISO-3046-1. For limited running time and continuous ratings, consult the factory. Obtain technical information bulletin (TIB-101) for ratings guidelines, complete ratings definitions, and site condition derates. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. For dual fuel engines, use the natural gas ratings for both the primary and secondary fuels.

Alternator Specifications

| Specifications | Alternator |
|--|--|
| Manufacturer | Kohler |
| Type | 4-Pole, Rotating-Field |
| Exciter type | Brushless, Rare-Earth Permanent Magnet |
| Leads: quantity, type | |
| 4RX | 12, Reconnectable |
| 4TX | 4, 120/240 |
| Voltage regulator | Solid State, Volts/Hz |
| Insulation: | NEMA MG1 |
| Material | Class H |
| Temperature rise | 130°C, Standby |
| Bearing: quantity, type | 1, Sealed |
| Coupling | Flexible Disc |
| Amortisseur windings | Full |
| Voltage regulation, no-load to full-load | ±0.5% |
| One-step load acceptance | 100% of Rating |
| Unbalanced load capability | 100% of Rated Standby Current |
| Peak motor starting kVA: | (35% dip for voltages below) |
| 480 V 4R12X (12 Lead) | 448 (60 Hz) |
| 480 V 4R13X (12 Lead) | 540 (60 Hz) |
| 240 V 4T13X (4 Lead) | 440 (60 Hz) |

- NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting.
- Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- Sustained short-circuit current enabling downstream circuit breakers to trip without collapsing the alternator field.
- Self-ventilated and drip-proof construction.
- Superior voltage waveform from a two-thirds pitch stator and skewed rotor.
- Total harmonic distortion (THD) from no load to full load with a linear load is less than 3.2%.
- Windings are vacuum-impregnated with epoxy varnish for dependability and long life.

Application Data

Engine

| Engine Specifications | 60 Hz |
|--|--|
| Manufacturer | Kohler |
| Engine: model, type | KG6208TAHD 6.2L Turbocharged, Aftercooled |
| Cylinder arrangement | V-8 |
| Displacement, L (cu. in.) | 6.2 (378) |
| Bore and stroke, mm (in.) | 101.6 x 95.25 (4.00 x 3.75) |
| Compression ratio | 9.8:1 |
| Rated rpm | 1800 |
| Max. power at rated rpm, kW (HP) | |
| NG | 151 (202) |
| LP | 131 (175) |
| Cylinder head material | Cast Aluminum |
| Piston type and material | Cast Aluminum |
| Crankshaft material | Forged steel |
| Valve (exhaust) material | Forged Steel |
| Governor type | Electronic |
| Frequency regulation, no-load to full-load | Isochronous |
| Frequency regulation, steady state | ±1.0% |
| Frequency | Fixed |
| Air cleaner type, all models | Dry |

Exhaust

| Exhaust System | 60 Hz |
|---|------------|
| Exhaust manifold type | Dry |
| Exhaust flow at rated kW, m ³ /min. (cfm) | 29 (1024) |
| Exhaust temperature at rated kW, dry exhaust, °C (°F) | 700 (1292) |
| Maximum allowable back pressure, kPa (in. Hg) | 15 (4.43) |
| Exhaust outlet size at engine hookup, mm (in.) | 88.9 (3.5) |

Engine Electrical

| Engine Electrical System | 60 Hz |
|--|-----------|
| Ignition system | Coil Pack |
| Battery charging alternator: | |
| Ground (negative/positive) | Negative |
| Volts (DC) | 12 |
| Ampere rating | 130 |
| Starter motor rated voltage (DC) | 12 |
| Battery, recommended cold cranking amps (CCA): | |
| Qty., rating for -18°C (0°F) | One, 650 |
| Battery voltage (DC) | 12 |

Fuel

| Fuel System | 60 Hz |
|--|-----------------------------------|
| Fuel type | Natural Gas, LP Gas, or Dual Fuel |
| Fuel supply line inlet | 1.5 NPT |
| Natural gas and LPG vapor fuel supply pressure, kPa (in. H ₂ O) | 1.74-2.74 (7-11) |

| Fuel Composition Limits * | Nat. Gas | LP Gas |
|---|------------|-------------|
| Methane, % by volume | 90 min. | — |
| Ethane, % by volume | 4.0 max. | — |
| Propane, % by volume | 1.0 max. | 85 min. |
| Propene, % by volume | 0.1 max. | 5.0 max. |
| C ₄ and higher, % by volume | 0.3 max. | 2.5 max. |
| Sulfur, ppm mass | 25 max. | |
| Lower heating value, MJ/m ³ (Btu/ft ³), min. | 33.2 (890) | 84.2 (2260) |

* Fuels with other compositions may be acceptable. If your fuel is outside the listed specifications, contact your local distributor for further analysis and advice.

Lubrication

| Lubricating System | 60 Hz |
|--|---------------|
| Type | Full Pressure |
| Oil pan capacity, L (qt.) § | 5.7 (6.0) |
| Oil pan capacity with filter and oil cooler, L (qt.) § | 9.0 (9.5) |
| Oil filter: quantity, type § | 1, Cartridge |
| § Kohler recommends the use of Kohler Genuine oil and filters. | |

Cooling

| Radiator System | 60 Hz |
|--|-------------|
| Ambient temperature, °C (°F) | 45 (113) |
| Engine jacket water capacity, L (gal.) | 7.3 (1.93) |
| Radiator system capacity, including engine, L (gal.) | 28.4 (7.5) |
| Engine jacket water flow, Lpm (gpm) | 126 (33.3) |
| Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.) | 81.4 (4633) |
| Heat rejected to charge air cooler at rated kW, dry exhaust, kW (Btu/min.) | 18 (1025) |
| Water pump type | Centrifugal |
| Fan diameter, including blades, mm (in.) | 711 (28) |
| Fan, kWm (HP) | 12.0 (16.1) |
| Max. restriction of cooling air, intake and discharge side of radiator, kPa (in. H ₂ O) | 0.12 (0.5) |

Operation Requirements


| Air Requirements | 60 Hz |
|---|--------------|
| Radiator-cooled cooling air, m ³ /min. (scfm) † | 290 (10,241) |
| Combustion air, m ³ /min. (cfm) | 6.9 (244) |
| Heat rejected to ambient air: | |
| Engine, kW (Btu/min.) | 37 (2106) |
| Alternator, kW (Btu/min.) | 10 (569) |
| † Air density = 1.20 kg/m ³ (0.075 lbm/ft ³) | |

| Fuel Consumption ‡ | 60 Hz |
|--|-----------------|
| Natural Gas, m ³ /hr. (cfh) at % load | Standby Ratings |
| 100% | 47.5 (1678) |
| 75% | 39.5 (1396) |
| 50% | 30.7 (1084) |
| 25% | 20.4 (720) |
| 0% | 8.3 (292) |
| LP Gas, m ³ /hr. (cfh) at % load | Standby Ratings |
| 100% | 18.8 (664) |
| 75% | 15.1 (532) |
| 50% | 11.0 (388) |
| 25% | 6.1 (216) |
| 0% | 3.4 (121) |

‡ Nominal fuel rating: Natural gas, 37 MJ/m³ (1000 Btu/ft.³)
LP vapor, 93 MJ/m³ (2500 Btu/ft.³)

LP vapor conversion factors:
8.58 ft.³ = 1 lb.
0.535 m³ = 1 kg.
36.39 ft.³ = 1 gal.

Controllers




APM402 Controller

Provides advanced control, system monitoring, and system diagnostics for optimum performance and compatibility.

- Digital display and menu control provide easy local data access
- Measurements are selectable in metric or English units
- Remote communication thru a PC via network or serial configuration
- Controller supports Modbus® protocol
- Integrated hybrid voltage regulator with ±0.5% regulation
- Built-in alternator thermal overload protection
- NFPA 110 Level 1 capability

Refer to G6-161 for additional controller features and accessories.

Sound Enclosure

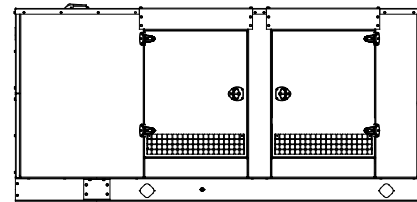

- Sound level (8 point logarithmic average) at 7 m (23 ft.) with full load: 71 dB(A).
- Sound level compared to competitor ratings with no load: 70 dB(A).*
- Sound attenuating enclosure uses acoustic insulation that meets UL 94 HF1 flammability classification and repels moisture absorption.
- Vertical air inlet and outlet discharge with 90 degree bends to redirect air and reduce noise.
- Internal-mounted critical silencer and flexible exhaust connector.
- Skid-mounted, steel (standard) or aluminum (optional) construction with hinged doors.
- Fade-, scratch-, and corrosion-resistant Kohler® Cashmere Power Armor™ textured e-coat paint.
- Lockable, flush-mounted door latches.
- Certified to withstand 299 kph (186 mph) wind load rating (aluminum enclosures only).

* Lowest of 8 points measured around the generator. Sound levels at other points around generator may be higher depending on installation parameters.

Standard Features

- Air Cleaner Restrictor Indicator
- Alternator Protection
- Battery Rack and Cables
- Electronic, Isochronous Governor
- Gas Fuel System (includes fuel mixer, electronic secondary gas regulator, gas solenoid valve, and flexible fuel line between the engine and the skid-mounted fuel system components)
- Flexible Fuel Line (for fuel supply connection)
- Integral Vibration Isolation
- Local Emergency Stop Switch
- Oil Drain Extension
- Operation and Installation Literature
- Steel Sound Enclosure
- Three-Way Catalyst

Available Options

Approvals and Listings

- CSA Approval
- UL 2200 Listing

Enclosure

- Aluminum Sound Enclosure

Fuel System

- Dual Fuel NG/LPG (automatic changeover)
- Fuel Filter Kit
- Secondary Gas Solenoid Valve (NFPA Fuel System)

Controller

- Two Input/Five Output Module
- Four Input/Fifteen Output Module
- Remote Emergency Stop
- Run Relay
- Manual Speed Adjust
- Lockable Emergency Stop
- Remote Annunciator panel

Cooling System

- Block Heater, 1500 W, 110- 120 V
 - Block Heater, 1500 W, 190- 240 V
- Recommended for ambient temperatures below 10°C (50°F)

Electrical System

- Battery
- Battery Charger
- Battery Charger Temperature Compensation
- Battery Heater
- Alternator Strip Heater
- Line Circuit Breaker (NEMA1 enclosure)
- Line Circuit Breaker with Shunt Trip (NEMA1 enclosure)

Miscellaneous

- Certified Test Report
- Engine Fluids (oil and coolant) Added
- Rated Power Factor Testing
- Rodent Guards

Literature

- General Maintenance
- Overhaul
- Production

Warranty

- 2-Year Basic Limited Warranty
- 5-Year Basic Limited Warranty
- 5-Year Comprehensive Limited Warranty

Other Options

- _____
- _____
- _____
- _____
- _____
- _____
- _____


Dimensions and Weights

Overall Size, L x W x H, mm (in.) :

3525 x 1154 x 1665 (138.8 x 45.4 x 65.5)

Weight, wet, kg (lb.):

With steel sound enclosure 1616 (3562)
 With aluminum sound enclosure 1515 (3340)

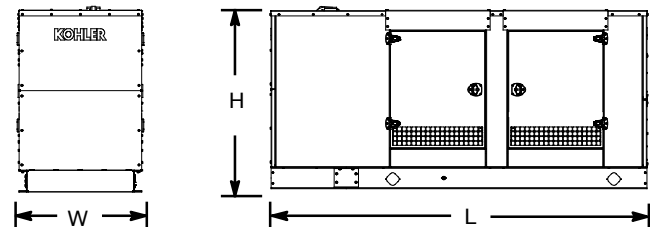

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

DISTRIBUTED BY: