


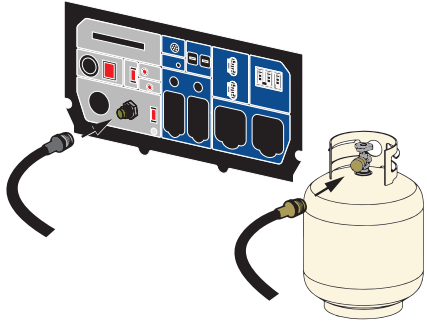


SELECTING PROPANE



OR

SELECTING GASOLINE

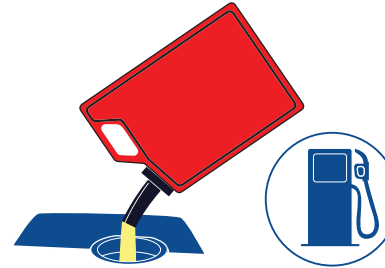

Step 1: Connect the included propane line to the generator and to the propane tank. Turn propane valve tank ON.


Step 2: Flip the FUEL CHOICE switch to LPG.

Step 1: Check the generator for gasoline. Add as needed.


Step 2: Flip the FUEL CHOICE switch to GAS.

CONTINUE STARTUP STEPS WITH EITHER FUEL


Step 3: Turn fuel switch counter clockwise to ON.




Step 4: Flip the LOW IDLE switch to OFF.




Step 5: Flip main breaker OFF.



Step 6: Flip the START UP switch to ON.



Step 7: Press START BUTTON.



Step 8: Flip main breaker ON and plug in devices.

