

## Features

### Honda GX630 Engine

You expect the best; you get the best. The Honda GX630 engine has more power, lower fuel consumption, and lower emissions than previous versions.

### Tri-Fuel

Designed to easily transition between three fuel sources; LP, natural gas, and gasoline.

### Low Oil Protection

In the event there is a low oil level, the engine will shut down, to protect the engine from damage.

### Sturdy Wrap-Around Welded Tubular Cradle

We use 14 gauge steel for dependable durability.

### 15 Gallon Fuel Tank

The EPA-approved steel fuel tank design eliminates hydrocarbon emissions.

### Four Wheel, Flat-Free Dolly Kit

Portability is important to get your generator where it needs to be.

### Premium Circuit Breakers


Dependable circuit breaker protection.

### 100% Load Tested

Every generator is fully tested prior to leaving our facility.

## HOME POWER®

**12,000 Starting Watts**  
**10,800 Running Watts**

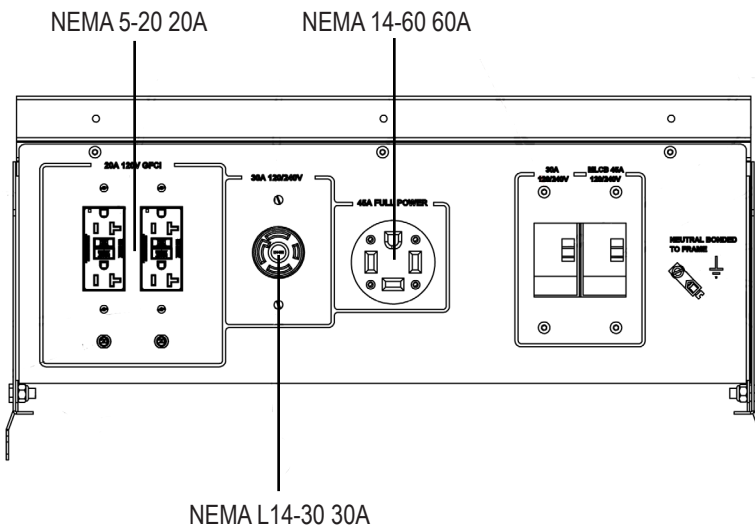

## Optional Accessories

### Generator Cover

When your generator is not in use, a cover will keep it dust and debris free.

### Plug-In Line Voltage Monitor

For when you want to verify the voltage output.

### WINCO Emergency Transfer Service Kit

You will be able to set up your generator quickly and safely to restore power to critical circuit breakers.

### 60 Amp (NEMA 14-60P) Plug

You supply the length of cord you need. We offer the plug.

### Low Pressure Fuel Solenoid

For peace of mind when you have to run your generator unattended.

### Maintenance Kit

Keep the engine at its peak performance to ensure the generator will be ready when needed most.

### Battery

Interstate U1 300 CCA.

## GENERATOR

STARTING WATTS <sup>(1)</sup>	12,000
RUNNING WATTS <sup>(1)</sup>	10,800
RUNNING AMPS @ 120 VAC <sup>(1)</sup>	90
RUNNING AMPS @ 240 VAC <sup>(1)</sup>	45
VOLTAGE REGULATION	CAPACITOR +/-5%
FREQUENCY REGULATION	+/-3%
MAIN CIRCUIT BREAKER	45 AMP
NEUTRAL BONDED	YES
120 VOLT RECEPTACLES	(2) NEMA 5-20 20A DUPLEX
120/240 VOLT RECEPTACLES	(1) NEMA L14-30 30A (1) NEMA 14-60 60A
GENERATOR WARRANTY <sup>(2)</sup>	2 YRS RESIDENTIAL

NOTES: (1) Based on gasoline fuel. Derate 10% for LP Gas and 20% for Natural Gas. (2) For complete generator warranty information contact your local WINCO dealer.

## GENSET

MOTOR STARTING (CODE G) <sup>(1)</sup>	5 HP
SOUND DATA <sup>(2)</sup> FULL LOAD	78
LIFTING EYE	NO
4-WHEEL DOLLY KIT <sup>(3)</sup>	STANDARD
PROTECTIVE ROLL FRAME	14 GAUGE STEEL
ASSEMBLED IN	USA
EPA APPROVED	YES
CARB APPROVED	NO
CSA APPROVED	NO
UNIT WARRANTY <sup>(4)</sup>	2 YRS RESIDENTIAL

NOTES: (1) Code G capacitor start motor. (2) All measurements are in db(a). Tested at 7 meters (23 ft.). (3) Shipped unassembled. (4) For more generator warranty information contact your local WINCO dealer.

## ENGINE

ENGINE BRAND	HONDA
ENGINE MODEL	GX630
ENGINE STARTER	ELECTRIC
ENGINE SPEED	3600 RPM
ENGINE CYLINDERS	V-TWIN
DISPLACEMENT/TYPE	688 CC / OHV
LOW OIL PROTECTION	STANDARD
RECOMMENDED OIL <sup>(1)</sup>	10W-30
OIL CAPACITY	1.7 QTS
FUEL TANK	15 GAL
FUEL GAUGE	ON TANK
FUEL USE: GASOLINE	1.67 GAL/HR
NATURAL GAS	200 FT <sup>3</sup> /HR - 204,000 BTU/HR
LP	2.2 GAL/HR - 201,304 BTU/HR
BATTERY SIZE <sup>(2)</sup>	BCI U1 300 CCA
ENGINE WARRANTY <sup>(3)</sup>	3 YRS RESIDENTIAL

NOTES: (1) The oil recommended is for normal applications. See owner's manual for the recommended oil for your application. (2) Battery not included (3) Contact your local Honda service center for engine warranty assistance.

## DIMENSIONS

DIMENSIONS (W/ DOLLY KIT)	44.7" x 36" x 33"
NET WEIGHT	425 LBS

NOTES: Dimensions are L x W x H.

## SHIPPING

SHIPPING DIMENSIONS <sup>(4)</sup>	50" x 40" x 36"
SHIP WEIGHT	460 LBS
FREIGHT CLASS	70

NOTES: Dimensions are L x W x H.



Specifications are subject to change without notice.