

WINCO®

HPS12000HE

Features

Honda GX630 Engine

You expect the best; you get the best. The Honda GX630 engine has more power, lower fuel consumption, and lower emissions than previous versions.

Tri-Fuel

Designed to easily transition between three fuel sources; LP, natural gas, and gasoline.

Low Oil Protection

In the event there is a low oil level, the engine will shut down, to protect the engine from damage.

Sturdy Wrap-Around Welded Tubular Cradle

We use 14 gauge steel for dependable durability.

15 Gallon Fuel Tank

The EPA-approved steel fuel tank design eliminates hydrocarbon emissions.

Four Wheel, Flat-Free Dolly Kit

Portability is important to get your generator where it needs to be.

Premium Square D Circuit Breakers

Square D is the industry leader in circuit breaker protection.


100% Load Tested

Every generator is fully tested prior to leaving our facility.

HOME POWER®

12,000 Starting Watts

10,800 Running Watts

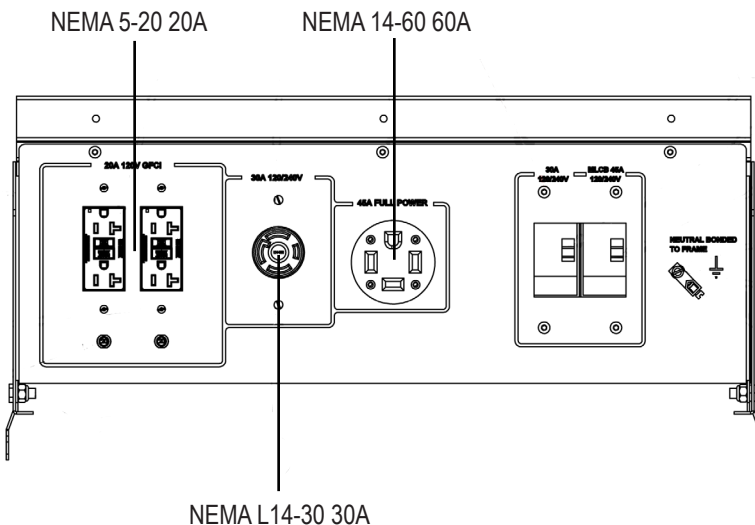

Optional Accessories

Generator Cover

When your generator is not in use, a cover will keep it dust and debris free.

Plug-In Line Voltage Monitor

For when you want to verify the voltage output.

WINCO Emergency Transfer Service Kit

You will be able to set up your generator quickly and safely to restore power to critical circuit breakers.

60 Amp (NEMA 14-60P) Plug

You supply the length of cord you need. We offer the plug.

Low Pressure Fuel Solenoid

For peace of mind when you have to run your generator unattended.

Maintenance Kit

Keep the engine at its peak performance to ensure the generator will be ready when needed most.

Battery

Interstate U1 300 CCA.

GENERATOR

| | |
|---------------------------------------|---|
| STARTING WATTS ⁽¹⁾ | 12,000 |
| RUNNING WATTS ⁽¹⁾ | 10,800 |
| RUNNING AMPS @ 120 VAC ⁽¹⁾ | 90 |
| RUNNING AMPS @ 240 VAC ⁽¹⁾ | 45 |
| VOLTAGE REGULATION | CAPACITOR +/-5% |
| FREQUENCY REGULATION | +/-3% |
| MAIN CIRCUIT BREAKER | 45 AMP |
| NEUTRAL BONDED | YES |
| 120 VOLT RECEPTACLES | (2) NEMA 5-20 20A DUPLEX |
| 120/240 VOLT RECEPTACLES | (1) NEMA L14-30 30A (1) NEMA 14-60 60A |
| GENERATOR WARRANTY ⁽²⁾ | 2 YRS RESIDENTIAL |

NOTES: (1) Based on gasoline fuel. Derate 10% for LP Gas and 20% for Natural Gas. (2) For complete generator warranty information contact your local WINCO dealer.

GENSET

| | |
|--|-------------------|
| MOTOR STARTING (CODE G) ⁽¹⁾ | 5 HP |
| SOUND DATA ⁽²⁾ FULL LOAD | 78 |
| LIFTING EYE | NO |
| 4-WHEEL DOLLY KIT ⁽³⁾ | STANDARD |
| PROTECTIVE ROLL FRAME | 14 GAUGE STEEL |
| ASSEMBLED IN | USA |
| EPA APPROVED | YES |
| CARB APPROVED | NO |
| CSA APPROVED | NO |
| UNIT WARRANTY ⁽⁴⁾ | 2 YRS RESIDENTIAL |

NOTES: (1) Code G capacitor start motor. (2) All measurements are in db(a). Tested at 7 meters (23 ft.). (3) Shipped unassembled. (4) For more generator warranty information contact your local WINCO dealer.

ENGINE

| | |
|--------------------------------|--|
| ENGINE BRAND | HONDA |
| ENGINE MODEL | GX630 |
| ENGINE STARTER | ELECTRIC |
| ENGINE SPEED | 3600 RPM |
| ENGINE CYLINDERS | V-TWIN |
| DISPLACEMENT/TYPE | 688 CC / OHV |
| LOW OIL PROTECTION | STANDARD |
| RECOMMENDED OIL ⁽¹⁾ | 10W-30 |
| OIL CAPACITY | 1.7 QTS |
| FUEL TANK | 15 GAL |
| FUEL GAUGE | ON TANK |
| FUEL USE: GASOLINE | 1.67 GAL/HR |
| NATURAL GAS | 200 FT ³ /HR - 204,000 BTU/HR |
| LP | 2.2 GAL/HR - 201,304 BTU/HR |
| BATTERY SIZE ⁽²⁾ | BCI U1 300 CCA |
| ENGINE WARRANTY ⁽³⁾ | 3 YRS RESIDENTIAL |

NOTES: (1) The oil recommended is for normal applications. See owner's manual for the recommended oil for your application. (2) Battery not included (3) Contact your local Honda service center for engine warranty assistance.

DIMENSIONS

| | |
|---------------------------|-------------------|
| DIMENSIONS (W/ DOLLY KIT) | 44.7" x 36" x 33" |
| NET WEIGHT | 425 LBS |

NOTES: Dimensions are L x W x H.

SHIPPING

| | |
|---------------------|-----------------|
| SHIPPING DIMENSIONS | 50" x 40" x 36" |
| SHIP WEIGHT | 460 LBS |
| FREIGHT CLASS | 70 |

NOTES: Dimensions are L x W x H.



Specifications are subject to change without notice.