

Key Features

- Manufactured in Greensboro, North Carolina, USA.
- Heavy duty generator system designed for prime power operation in rental, construction and special events applications.

Skidbase and Enclosure

- Package foundation is a heavy duty, oilfield-ready skidbase designed with minimum 110% environmental containment to prevent any leakage of fuel, oil, or coolant.
- Optimized package design combines low noise levels with small footprint and full load performance capability in high ambient temperatures.
- The enclosure is coated with a 2 part epoxy over the zinc plated steel for superior corrosion resistance and a high gloss powder paint for long life.
- Wide opening side access doors are hinged, providing easy access and are equipped with recessed, pad-lockable handles.
- Package is equipped with a center-point lifting eye for safe, well-balanced hoisting, designed with a 5 x safety factor for the weight of a fully fueled unit with running gear.

Engine and Cooling System

- Industrial, heavy-duty diesel engine is emissions certified to current EPA and CARB requirements and provides optimum mix of performance and fuel economy.
- Electronically controlled engine provides isochronous frequency control and advanced diagnostic monitoring and protection.
- Oversized cooling system rated for high ambient tempera-

ture (minimum 40°C/104°F) operation without de-rating.

- The engine generator assembly is mounted on fail-safe vibration isolators.
- Coolant and oil drains are piped to bulkhead fittings mounted on the enclosure and all filters and maintenance points are easily accessed for safe and easy servicing.
- Engines are globally supported by the engine OEM and Clarke Power Generation, Inc.



Generator

- Leroy Somer alternators feature AREP brushless excitation providing industry leading motor starting kVA and 300% overload capability.
- Class H insulation with upgraded environmental coating for ultimate resistance to high temperature and humidity.
- Reconnection link board to easily configure the units for operation at most common voltages.

Voltage / Frequency	P.F.	Armature Connection	Rating	Amps	kW	kVA
480V-3Ø-60Hz	0.8	Series Wye	Prime	287	191	239
			Standby	316	210	263
240V-3Ø-60Hz	0.8	Parallel Wye	Prime	574	191	239
			Standby	631	210	263
208V-3Ø-60Hz	0.8	Parallel Wye	Prime	607	175	219
			Standby	668	193	241

RC240D-T3 *Mobile Prime Generators*

Control System

- Digital control provide at-a-glance monitoring and simple access of vital engine and generator parameters. Micro-processor-controlled startup at the push of a button and protects the generator system from an array of faults while providing the operator with clear communication.
- Engine fault codes are displayed on the main LCD display, providing operators and technicians with a numeric and text explanation of the fault code, minimizing the need for expensive hand-held code scanners.
- Standard remote Auto Start / Stop capability via two wire, closed contact logic, allows for connection to automatic transfer switchgear and other remote starting devices.
- Battery disconnect switch is mounted inside the enclosure.

Power Connections

- All controls and connection points are grouped at the rear of the unit for safety and operator convenience.
- Power cables are connected at an oversized five lug (L1 L2 L3 N PE) terminal board capable of accepting bare end cable or terminated cables.
- Convenience receptacle panel includes individual branch circuit breakers.

Fuel System

- Single fuel tank sized for 24 hour runtime is mounted within the skid base, providing double wall protection.
- Fuel tank mounted low in frame and centered to ensure balanced lifting and low center of gravity.
- The fuel filler is located within the containment basin, minimizing possible spillage.
- Standard Racor-style fuel / water separator and fine micron secondary fuel filter keep contaminants out of the system

and increase reliability.


- The containment system features a three-inch drain plug for easy cleaning, and the fuel tank has a drain plug mounted behind the containment plug.
- Leak-proof fuel vents eliminate the potential for fuel purge during out-of-level conditions during transport and load / unload.
- Low fuel shutdown ensures the engines will not lose prime if they run out of fuel.

Running Gear

- Integrated running gear system mounts directly to generator skidbase providing an industry-best low center of gravity for safe, stable towing, on-road or off-road.
- Tandem axle torsion suspension with E-Z-Lube hub assemblies and electric brakes.
- All models feature high quality, grommet-mount lighting and meet Federal Motor Vehicle Safety Standards for lighting and conspicuity.
- Trailer-to-vehicle connector is a 6-pole round plug with a high quality, jacketed wiring harness.
- All units are equipped with a 3-inch pintle eye, wheel chocks and a high quality, heavy-duty jack stand.

Warranty

- All models are covered by a comprehensive limited warranty:
- Package: 1 year / 2000 hours
- John Deere Engine: 1 year / unlimited hours or 2 years / 4000 hours
- Leroy Somer Alternator: 2 years / 4000 hours

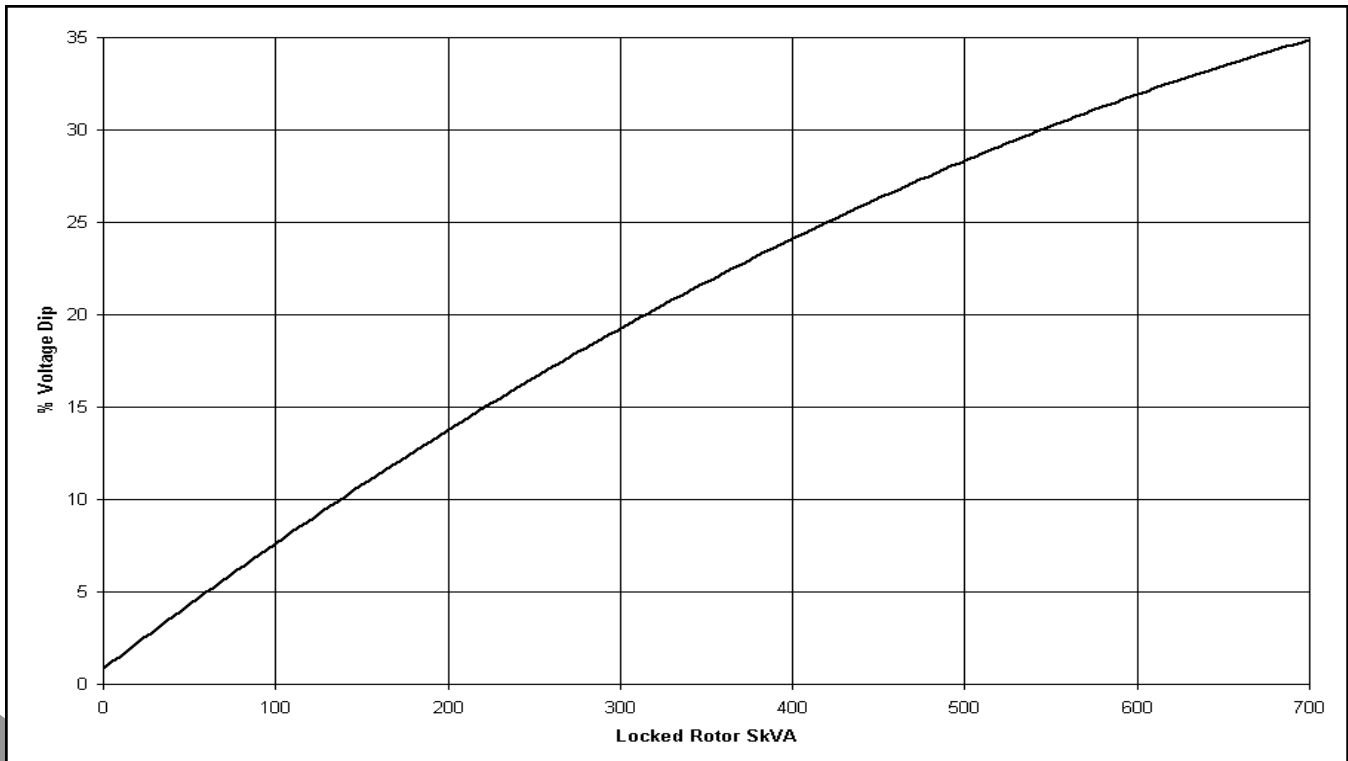



RC240D-T3 *Mobile Prime Generators*


Engine Data	
Engine Manufacturer	John Deere
Model Number	6068HF485
Prime Output @ Rated Speed	286 HP 214 kWm
Standby Output @ Rated Speed	315 HP 235 kWm
Engine Type	Inline 4-cycle
Engine Control	ECU
Emissions Certification	EPA Tier 3
Number of Cylinders	6
Aspiration	Turbocharged / Intercooled
Bore × Stroke	4.2 × 5.0 in 106 × 127 mm
Displacement	415 in ³ 6.8 L
Compression Ratio	17 : 1
Governor Type	Electronic / Isochronous
Speed Regulation Accuracy	+ / - 0.25% Steady State
Single Step Load Acceptance	100%
Cooling System	50% Glycol / 50% Water
Charging Alternator Output	65 A
DC System Voltage	12 V
Battery Output	1000 CCA

Fluid Capacities		Gal	L
Oil Sump Capacity		8.6	32.6
Cooling System Capacity		9.0	34.1
Usable Fuel Cell Capacity		253.7	960.4
Fuel Consumption	Gal / h	L / h	Runtime
@ 25% Load	4.23	16.01	60.0
@ 50% Load	7.04	26.65	36.0
@ 75% Load	10.28	38.91	24.7
@ 100% Load	13.49	51.07	18.8

Alternator Data	
Alternator Manufacturer	Leroy Somer
Alternator Model	LSA 462 M5
Alternator Type	Four Pole Revolving Field
Number of Leads	12
Insulation Class	H
Frequency	60 Hz
Available Voltages—3Ø	208 / 240 / 416 / 480 V
Available Voltages—1Ø	120 / 139 / 240 / 277 V
Voltage Connection Method	Buss Bar Reconnectable
Excitation Method	Brushless with AREP
Voltage Regulator Model	R448
Voltage Regulation Accuracy	+ / - 0.5% Steady State
Total Harmonic Distortion (THD)	<5% @ No Load
Telephone Influence Factor (TIF)	<50





Power Connections		Qty
20A—125V GFCI Duplex (NEMA 5-20R)		2
50A—125/250V Temp Power (CS6369)		3
Terminal Board Maximum Cable Size (Bare Wire)	1000 MCM	
Terminal Board Maximum Cable Size (Lugged)	1000 MCM	

Reference Conditions		
Rated Ambient Temperature	10°-104°F	-12°-40°C
Minimum Starting Temperature (Standard)	10°F (-12°C)	
Minimum Starting Temperature (w/ Cold Start Opt)	0°F (-18°C)	
Rated Altitude		
Temperature De-rate Factor		
Altitude De-rate Factor		

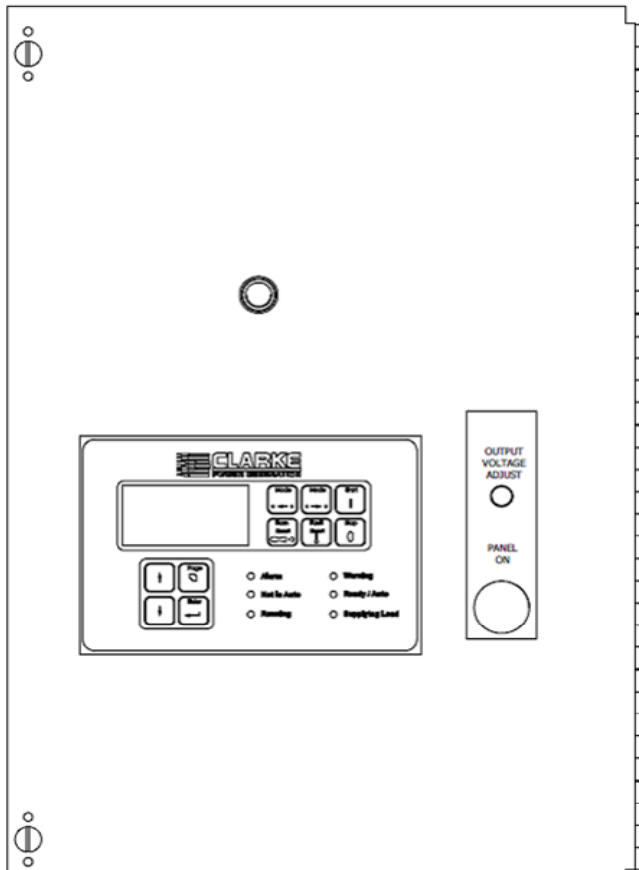

RC240D-T3 *Mobile Prime Generators*

Running Gear	To 49CFR571 requirements	
Configuration	Tandem axle	
Suspension	Torsion bar	
Standard Brake System Configuration	Electric	
Tires	9.50-16.5 LT/E	
Wheels	16.5" × 6.75" (419 mm × 171 mm), 8 lug on 6.5" (165 mm) bolt circle	
Lighting and Reflectors	Meets FMVSS 571.108 requirements	
Electrical Connection to Towing Vehicle	Six pole round plug	
Standard Coupling Connection	3" (76 mm) Pintle eye	
Hitch Height	21-25.5-30-34.5 in	533-648-762-876 mm
Safety Chains	2 × 3/8" (10 mm) Chains with slip hooks and safety latches	
Jack Stand Configuration	5,000lb (2,268 kg) Capacity, top wind with sand shoe, trunion mounted	
Weights & Dimensions (w/ Running Gear)		
Length	203.9 in	5,179 mm
Width	75.7 in	1,923 mm
Height	94.8 in	2,408 mm
Weight (Shipping)	7,717 lb	3,500 kg
Weight (Ready to Run)	9,678 lb	4,390 kg
Weights & Dimensions (Less Running Gear)		
Length	140.4 in	3,567 mm
Width	49.8 in	1,264 mm
Height	79.4 in	2,018 mm
Weight (Shipping)	6,403 lb	2,904 kg
Weight (Ready to Run)	8,364 lb	3,794 kg
Sound Level @ 23ft (7m), 100% Load	69 dB(A)	

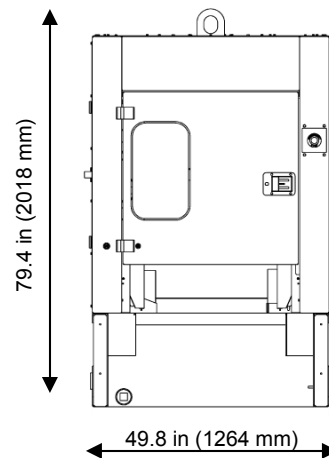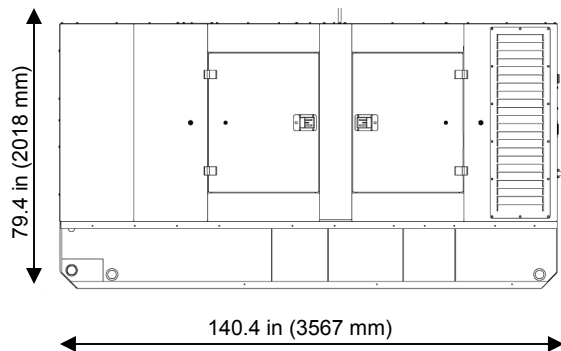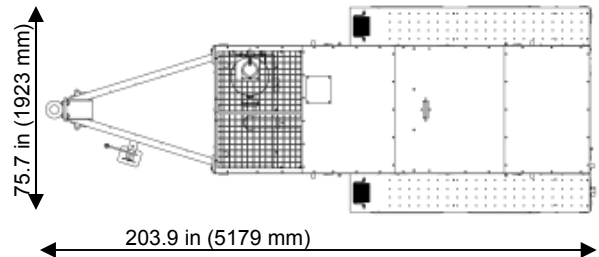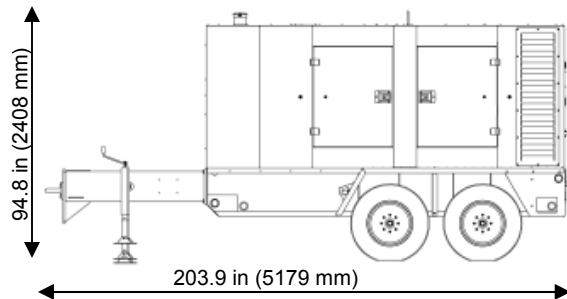

CLARKE®



Power Generation, Inc.

Due to continuous product improvement, specifications subject to change without notice.

Clarke Power Generation, Inc.
8015 Piedmont Triad Pkwy.
Greensboro, NC 27409

866.334.4367
clarkegen.com

© 2014 Clarke Power Generation, Inc. G131730 REV A