


TYPICAL WIRING DIAGRAM

CONNECT LINE WIRES TO PROPER TERMINALS ON RECEPTACLE



LISTED
POWER OUTLET
66FL

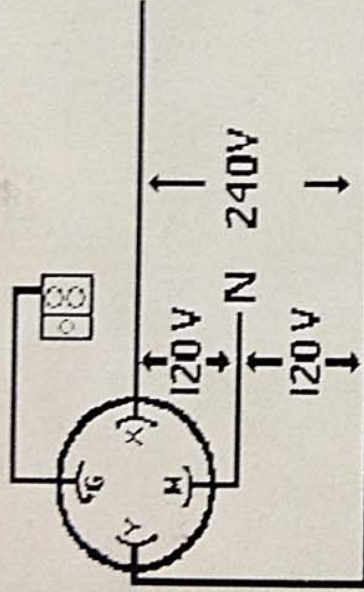

USE COPPER WIRE ONLY

USE ONLY 60 DEG.C (140 DEG.F) CONDUCTORS ON ALL FIELD INSTALLED LINE, LOAD AND NEUTRAL TERMINATIONS.

| CONNECTOR | WIRE RANGE | |
|--|------------|----------|
| | SOLID | STRANDED |
| LINE-DUPLEX LOAD-VIA RECEPT./PLUG NEUTRAL-DUPLEX EQUIP. GRD. -GL3 | 14-10 | 14-10 |
| | 14-10 | 14-10 |
| | 14-10 | 14-10 |
| | 12-8 | 12-2 |

LUG TIGHTENING TORQUE (LB-IN)

| SCREW TYPE | WIRE SIZE | TORQUE |
|------------|-----------|--------|
| SLOT | 14-10 | 32-35 |
| | 8 | 36-40 |
| | 6-4 | 41-45 |
| | 3-2/0 | 45-50 |

RAINFOOF POWER INLET

MODEL NO. **U030ND**

30 AMPS
120/240 VOLTS A - C
TYPE 3R ENCLOSURE

WHEN CABINET HAS PROVISION FOR A CONDUIT HUB, SELECT FROM CHART BELOW.

| CONDUIT SIZE | CLOSURE | 3/4 | 1 | 1 1/4 | 1 1/2 |
|--------------|---------|-----|-----|-------|-------|
| CAP | | | | | |
| CAT. NO. | E01 | E07 | E10 | E12 | E15 |



DANGER

HAZARD OF ELECTRICAL SHOCK OR BURN. TURN OFF POWER BEFORE WORKING INSIDE THIS EQUIPMENT.

MIDWEST ELECTRIC PRODUCTS, INC.
P.O. BOX 910
MANKATO, MN 56002-0910
WWW.MIDWESTELECTRIC.COM

MNP601344

