



Quality Generators Since 1927

# W15PTOS



### Generator End:

- 100% copper windings - longer life and improved motor starting
- Single phase, 2 pole
- Rotating field brushless type
- Maintenance free bearings
- Class H Insulation
- Capacitor voltage regulated

### Features:

- 60A NEMA 14-60P full power plug included
- Large 3" Voltmeter
- Low harmonic content, appropriate for sensitive loads
- Cast iron gear case with 515 RPM 1 3/8" spline input shaft
- Compact for easy storage
- Square D mainline circuit breaker
- Protective PTO shield
- Heavy duty steel mounting base
- Rodent screens
- Helical gears for smooth operation
- Ground lug

### Accessories (optional):


- PTO drive shaft (tumbling bar)
- PTO trailer kit
- 3 point hitch kit with PTO shaft
- Manual transfer switches

|                           |                        |
|---------------------------|------------------------|
| POWER RATING (watts)      | 15,000                 |
| AMPS (1)                  | 60                     |
| VOLTS                     | 120/240                |
| PHASE                     | Single                 |
| VOLTAGE REGULATION        | +/- 5%                 |
| TOTAL HARMONIC DISTORTION | < 5%                   |
| RATING                    | 125° C                 |
| TYPE                      | 2-POLE REVOLVING FIELD |
| GENERATOR SPEED           | 3600 RPM               |
| VOLTAGE CONTROL           | CAPACITOR              |
| PTO INPUT SPEED           | 515                    |
| REQUIRED INPUT HP (2)     | 30                     |
| MOTOR STARTING (Code G)   | 7.5 HP                 |
| 120 VOLT RECEPTACLES      | 1x NEMA 5-20R          |
| 120/240 VOLT RECEPTACLES  | 1x NEMA 14-60R         |
| MAIN LINE CIRCUIT BREAKER | 60 AMP                 |
| DIMENSIONS (LxWxH)        | 33" x 19" x 20"        |
| NET WEIGHT                | 232 lbs                |
| SHIP WEIGHT               | 242 lbs                |
| WARRANTY                  | 1 YR                   |

NOTES: (1) Unity (1.0) power factor (2) Recommended HP at PTO of tractor for full rated output. Each 2 HP provided at the PTO will result in 1kW electrical output up to the nameplate reading



Presented by:

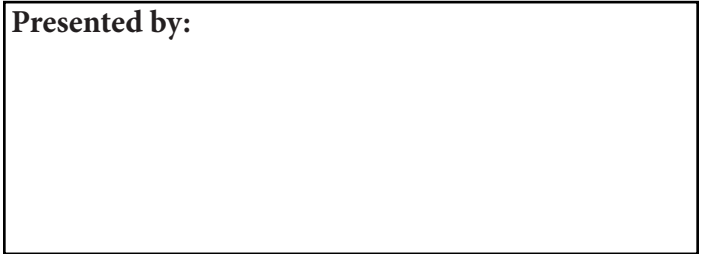

Toll Free: 1-800-733-2112  
sales@wincogen.com

[www.wincogen.com](http://www.wincogen.com)

225 South Cordova Avenue  
Le Center MN, 56057