



**STANDBY  
GENERATORS**

# 8kW<sup>1</sup> STANDBY GENERATOR



## BRIGGS & STRATTON® THE SMART CHOICE

For the discerning homeowner that is looking for the smartest, most reliable permanent backup power solution.



### Designed for Easy Installation & Maintenance

- Easy to move into installation location with two-wheel dolly
- Approved for installation as close as 18" to a building<sup>2</sup>
- Removable roof and side panels provide better service access to the engine and alternator

### Compact Size

- The smallest generator footprint in its class
- Perfect for small properties

### Commercial-Grade Briggs & Stratton Vanguard™ Engine

- Powerful V-Twin OHV engine
- Can be converted between natural gas (NG) and liquid propane vapor (LP) during installation

### Quality Clean Power

- Ensures your electronics are safely powered

### Corrosion Resistant Enclosure & Base

- Made with automotive grade galvanized steel to resist rust
- Powder-coated paint for years of protection against chips and abrasions



## GENERATOR SET RATINGS

MODEL	VOLTAGE	PHASE	HZ	BREAKER	LIQUID PROPANE		NATURAL GAS		LIMITED WARRANTY <sup>4</sup>
					LP kW	LP AMPS	NG kW	NG AMPS	PARTS, LABOR, TRAVEL
Briggs & Stratton 040351	120/240	1	60	35	8	33.3	6	25	4 Year

<sup>1</sup> This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-04 (motors and generators).

<sup>2</sup> The installation manual contains specific instructions related to generator placement in addition to NFPA 37, including the requirement that carbon monoxide detectors be installed and maintained in your home.

<sup>3</sup> Warranty details available at [www.briggsandstratton.com](http://www.briggsandstratton.com)



**ENGINE SPECIFICATIONS**

ENGINE		LUBRICATION	
Engine Model	Briggs & Stratton Vanguard™	Oil Capacity (oz)	48
Engine Model Type Trim Number	319775-0109E1-K1024	Lubrication System	Full Pressure
Engine Speed (RPM)	3600	Recommended Oil	5W30 Full Synthetic
Engine Fuel	Liquid Propane (LP) or Natural Gas (NG)	Low Oil Pressure Sensor	Yes
Engine Cylinder Configuration	OHV	ALTERNATOR SPECS	
Number of Cylinders	1	Manufacturer	Briggs & Stratton
Displacement (cc)	31 / 500	Type	Self-Excited, Rotation Field
Bore & Stroke (in)	2.83 / 2.76	Voltage Regulator	Automatic
Compression Ratio	8.3:1	Insulation	Class F
Governor Type	Mechanical	CONTROLLER FEATURES	
Frequency Regulation	+/- 2.5 Hz	Hour Meter	Yes
Valves	OHV with Hardened Seats	LED Digital Display	Yes
Ignition System	Fixed Timing	Fault Code Display	Yes
Starter Motor Rating Voltage	12 Volt	Weekly Exerciser	Yes
Battery	12 Volt		

**OPERATIONS**

FUEL CONSUMPTION <sup>1</sup>				SOUND RATING AT 7 METERS	
50% Load		100% Load		71.3 dBA	
Liquid Propane	37.6 ft <sup>3</sup> / hr	1.04 gal / hr	56.4 ft <sup>3</sup> / hr	1.57 gal / hr	Lowest measurement of 12 microphones around generator. Sound level measurement at other locations around generator may be different depending upon installation configuration.
Natural Gas	94 ft <sup>3</sup> / hr	—	121 ft <sup>3</sup> / hr	—	

<sup>1</sup> Fuel consumption rates are estimated based on normal operating conditions. Generator operation may be greatly affected by elevation and the cycling operation of multiple electrical appliances – fuel flow rates may vary depending on these factors.




ADDITIONAL INFORMATION

OTHER FEATURES	
Enclosure Material	Galvanneal Steel with Corrosion Resistant Paint
Overcrank Protection	Yes
Engine Warm Up (sec)	20 or 50 Automatic Transfer Switch Controlled
Engine Cool Down (min)	1
Response Time (sec)	26 or 56 Automatic Transfer Switch Controlled
Monitoring Options	Basic Wireless Monitor InfoHub™ Monitor
Built-in Battery Charging	Yes

CERTIFICATION	
CARB Compliant	Yes
NFPA Approved	Yes
cUL Listed to CSA 22.2 NO 100-04	Yes
NEMA Compliant	Yes
EPA Certified Fuel System	Yes

WEIGHT AND DIMENSIONS	
Assembled Weight (lbs)	252
Overall Dimensions (in)	28 x 24.4 x 35.1
Packaged Weight (lbs)	310
Packaged Dimensions (in)	39 x 35.5 x 42

AVAILABLE ACCESSORIES	
Maintenance Kit	6261
Cold Weather Kit	6262
Basic Wireless Monitor	6264
InfoHub	6260
Remote Status Monitor	6144

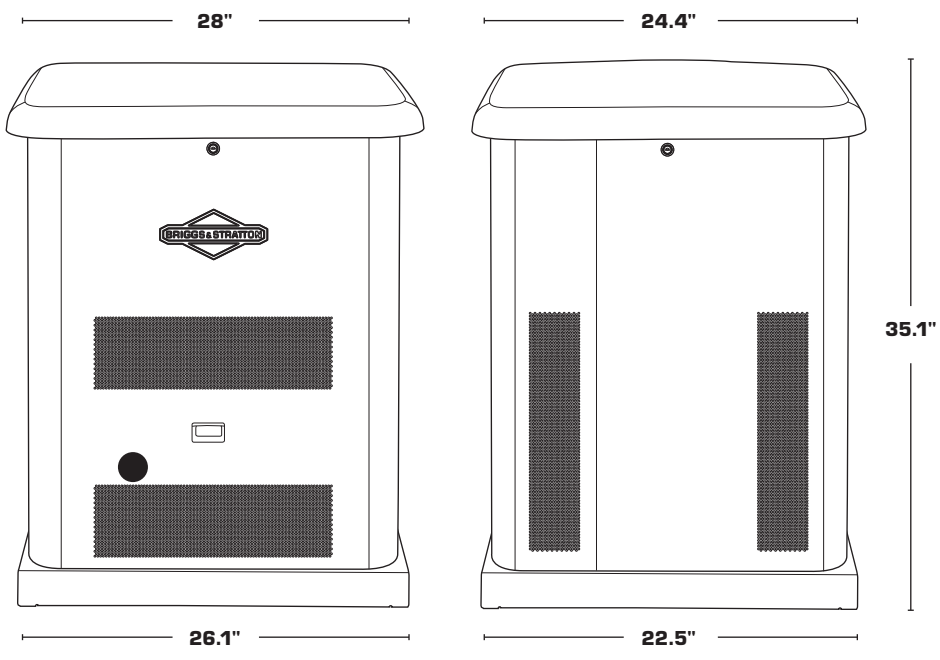



**FUEL PIPE SIZE RECOMMENDATION CHART (CAPACITY IN THOUSANDS OF BTU/HOUR)**

<b>Natural Gas / Inlet Pressure less than 2 PSI / Pressure Drop 1/2" Water Column / Specific Gravity 0.60</b>						
	1/2" pipe capacity	3/4" pipe capacity	1" pipe capacity	1-1/4" pipe capacity	1-1/2" pipe capacity	2" pipe capacity
20' Length*	118	247	466	957	1,430	2,760
40' Length*	81	170	320	657	985	1,900
60' Length*	65	137	257	528	791	1,520
80' Length*	56	117	220	452	677	1,300
100' Length*	50	104	195	400	600	1,160

<b>Liquid Propane / Inlet Pressure 11" Water Column / Pressure Drop 1/2" Water Column / Specific Gravity 1.50</b>						
	1/2" pipe capacity	3/4" pipe capacity	1" pipe capacity	1-1/4" pipe capacity	1-1/2" pipe capacity	2" pipe capacity
20' Length*	200	418	788	1,617	2,423	4,666
40' Length*	137	287	541	1,111	1,665	3,207
60' Length*	110	231	435	892	1,337	2,575
80' Length*	101	212	400	821	1,230	2,370
100' Length*	101	212	400	821	1,230	2,370

\*Total length of piping from outlet of regulator to appliance furthest away.

**ADDITIONAL INFORMATION**

<b>TRANSFER SWITCH SPECIFICATIONS</b>		
<b>Prewired 16 Circuit</b>	100 AMP	Model #071076
<b>Standard 16 Circuit</b>	100 AMP	Model # 071047
<b>Voltage Rating</b>	120/240	
<b>Number of Protected Circuits</b>	Select Circuit: 16	
<b>UL Approved</b>	Yes	
<b>NEMA 3R Rated</b>	Yes	

**SUPPORT EVERY STEP OF THE WAY**

**NEED HELP? Just call 800-759-2744**  
 Our technical support team is trained to answer questions on our generators, transfer switches and accessories.

---

**CALL TODAY FOR A FREE IN-HOME ESTIMATE!**  
**800-743-4115**

**Disclaimer:** Not for Prime Power or use where standby systems are legally required, for serious life safety or health hazards, or where lack of power hampers rescue of fire-fighting operations.

**BRIGGS & STRATTON**

POST OFFICE BOX 702  
 MILWAUKEE, WI 53201 USA  
 Copyright ©2016. All rights reserved. BS1007-A – 11/16