


INSTALLATION INSTRUCTIONS

HONDA WIRELESS REMOTE

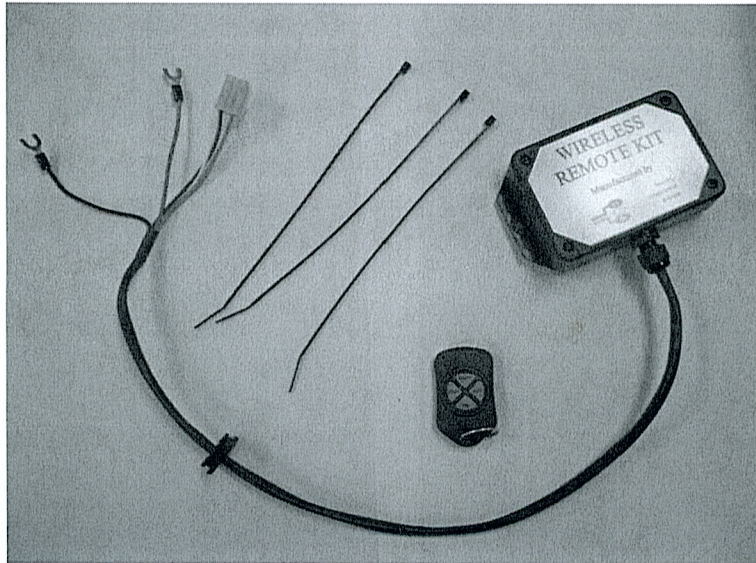

Installation time-

- 10 to 15 minutes



Installation tools-

- Phillips screwdriver
- Flat head screwdriver
- Razor knife
- Any kind of snips



1. Begin installation by removing the battery access panel located on the lower left hand side of the front panel on the generator. Remove the access panel by loosening the holding screw using a flat head screw driver.



2. Next, cut the removable tab out of the access panel shown in pics below.

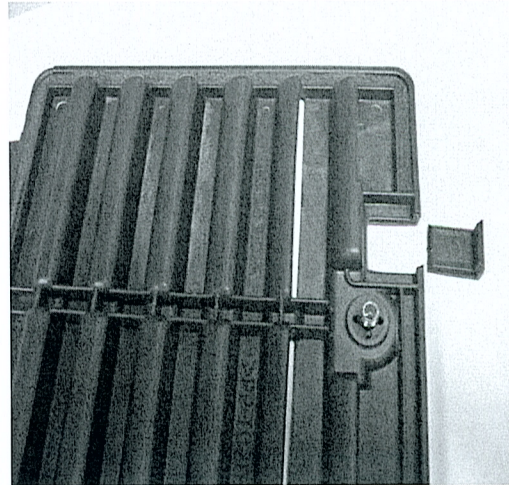
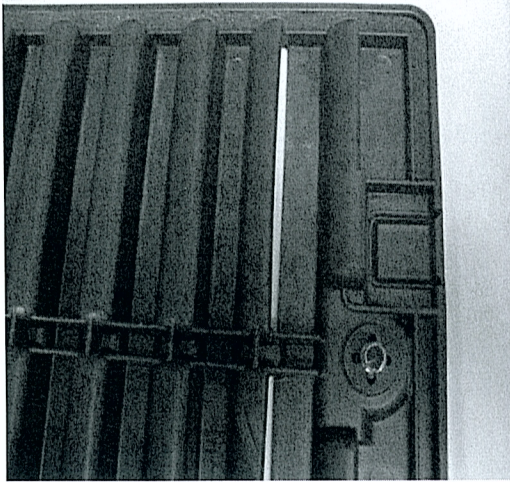


3. There is a square rubber grommet located on the receiver harness, this snaps into place on the battery access panel in the position where the tab has been removed.

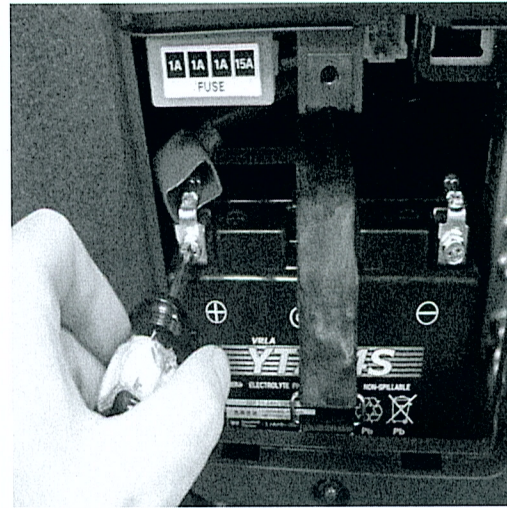
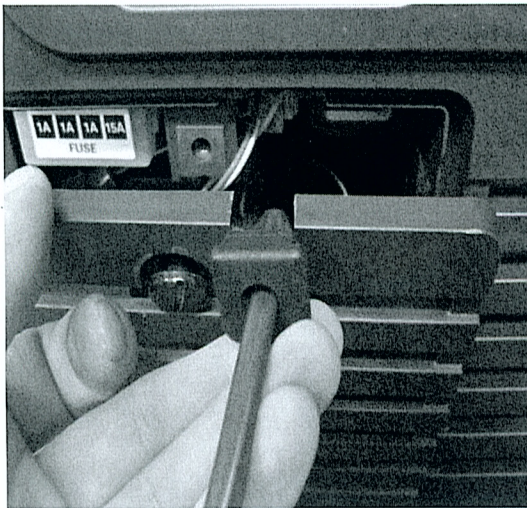


4. After the grommet is installed, loosen the screw on the positive battery terminal using a Phillips screwdriver, then snap the fork terminal from the red receiver wire into place and tighten holding screw. Repeat for the negative battery terminal using the black receiver wire.

5. Plug the connector into place above the battery as shown in the picture below

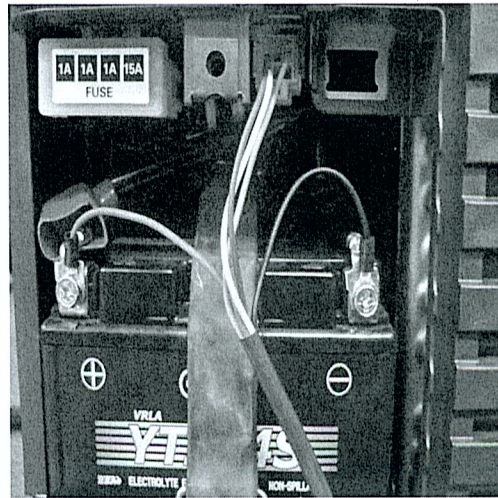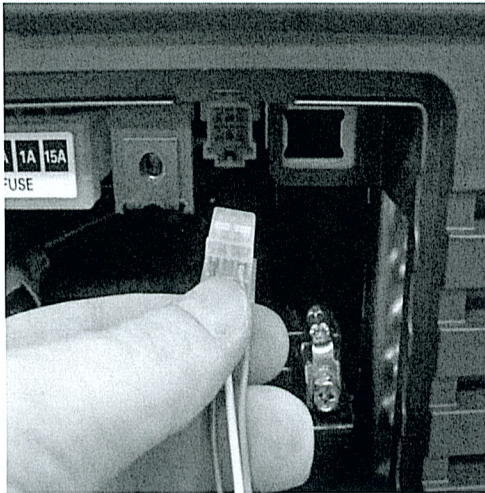

6. Put the access panel back in place on the front cover of the generator and tighten the holding screw.
7. Attach the receiver to the frame of the generator using the three tie straps provided. Tie one on either side of the receiver box and one to hold the wire harness to the generator as shown below. Cut excess from tie straps once installed.

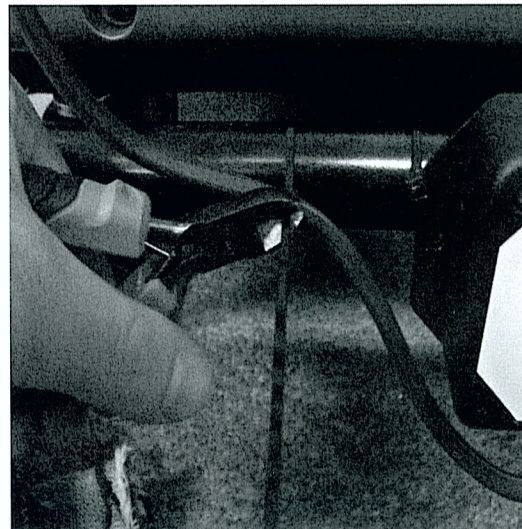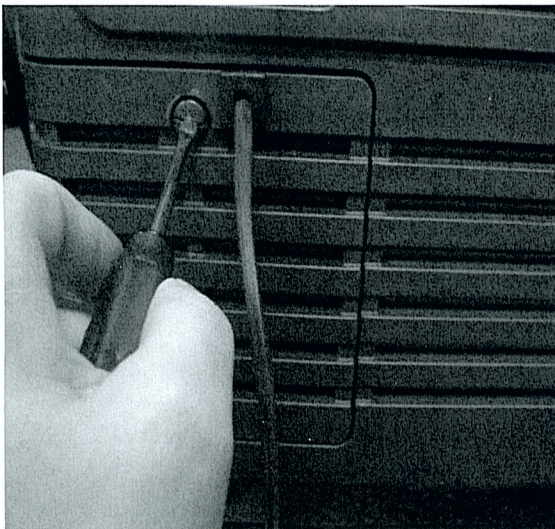

Wireless Remote installation complete!!!
Please refer to the User Manual for remote operation instructions and product details.