

Finally...
a lightweight, easy-to-install condenser pad
that meets wind loading requirements
up to 180 MPH!

QT8036 / QT8040

QwikHurricane™ Pad

U.S. Patents Pending



Hurricane-secure condenser pad is
rated for winds up to 180 mph and **exceeds
Miami-Dade 175 mph wind requirements.**

UV-resistant, high-durability construction is lightweight
(*for shipping and easy 1-man handling*), but heavy once filled.

Contains a super absorbent material that acts as a unique gelling
agent... Once water is added, it forms a solidus gel that provides
freeze protection.

Includes corrosion-resistant
Tie-Down Assemblies to secure
the outdoor unit for exceptional
hurricane protection (**304
Stainless Steel, 13 gauge**).
Tie-Down Assemblies are
completely adjustable to properly
secure any size and shape of
outdoor unit.

Included Hardware:



Our 36" x 36" pad weighs
just 29 lbs for transport,
but 163 pounds once filled.

The 40" x 40" pad weighs
just 35 lbs for transport, but
203 lbs filled.

Water Fill Plug

QwikHurricane™ Pad

The Florida building code rated air conditioning support pad is lightweight when purchased, but weighs enough to meet code requirements up to 180 mph wind loading when filled with water and secured with stainless steel tie-down assemblies (supplied). Each pad includes a unique gelling agent that, once water is added, forms a solidus gel. Optional ground and concrete anchors provide additional hurricane protection when needed.

FLORIDA BUILDING CODE NOTICE

This product meets the following building code requirements:

1. **Mechanical Vol., Sect. 304.10 Clearances from Grade** – This product provides 4" of clearance above adjoining grade.
2. **Mechanical Vol., Sect. 301.15 Wind resistance** – Load combinations in accordance with the Florida Building Code, Building Vol. – Ch. 16 and ASCE 7 – Ch. 2.

Wind pressure calculations performed per Florida Building Code- Ch. 16 and ASCE 7 - Ch. 29. For the most up-to-date documentation, visit our website, www.qwik.com/pad or call 1-800-866-3550.

To install the unit:

1. Choose acceptable equipment pad size and anchoring method that meets wind loading requirements in your area. Use the load tables included with the QwikHurricane™ Pad or go to www.qwik.com/pad/ to use our automated calculation software.
2. Tip pad towards fill port corner. This will cause gelling agent to collect near fill port for proper distribution when filling.
3. Level the pad on the ground.
4. Fill pad completely with tap water. Water will solidify into gel over time.
5. Install concrete or ground anchors, when required.
6. Secure the equipment to the pad using tie-down assembly hardware.


Specifications

	QT8036	QT8040
Dimensions	36" x 36" x 4"	40" x 40" x 4"
Material	Linear Low Density Polyethylene (LLDPE)	Linear Low Density Polyethylene (LLDPE)
Pad Weight (Empty)	29 lb	35 lb
Pad Weight (Full)	163 lb	203 lb
Maximum Condensing Unit Size	32" x 32"	36" x 36"


Optional Accessories

Anchors may be required to meet high wind loading, depending on the unit size and weight. Use the load tables included with the QwikHurricane™ Pad or go to www.qwik.com/pad/ to use our automated calculation software to determine if anchors are necessary for your installation.

Ground Anchor Kit (pkg of 2)	QT8110
-------------------------------------	---------------



Concrete Anchor Kit (pkg of 4)	QT8111
---------------------------------------	---------------

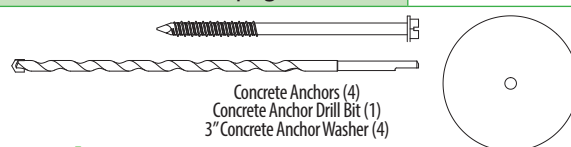

For more details or information about the QwikHurricane™ Pad visit www.qwik.com/pad/ or email info@qwik.com

QwikProducts™, QwikHurricane™ Pad are trademarks of Mainstream Engineering Corporation® Rockledge, Florida 32955, (321) 631-3550
© 2018 Mainstream Engineering Corporation® • U.S. Patents Pending



Mainstream Engineering Corporation®
1-800-866-3550
www.qwik.com