

# iPro4200

## 4200 Watt Open Frame Digital Inverter Gasoline Portable Generator

3500 Running Watts | 4200 Peak Watts



50 State Model



Fuel efficient, 4 gallon fuel tank that runs 22 hrs at 25% load

Two 5V USB ports for charging sensitive electronics such as phones or tablets

OSHA GFCI outlets, three 120V 20A duplex 5-20R outlets

VFT meter displays volts, frequency, and lifetime hours

Fuel efficiency of enclosed inverter combined with durability of open frame generator



<3% THD  SINE WAVE OUTPUT



Dependable 5.8 HP 212cc OHV 4-Stroke Westinghouse engine




A variable speed engine and low tone mufflers significantly reduce operating noise

### What Comes in the Box



### Control Panel

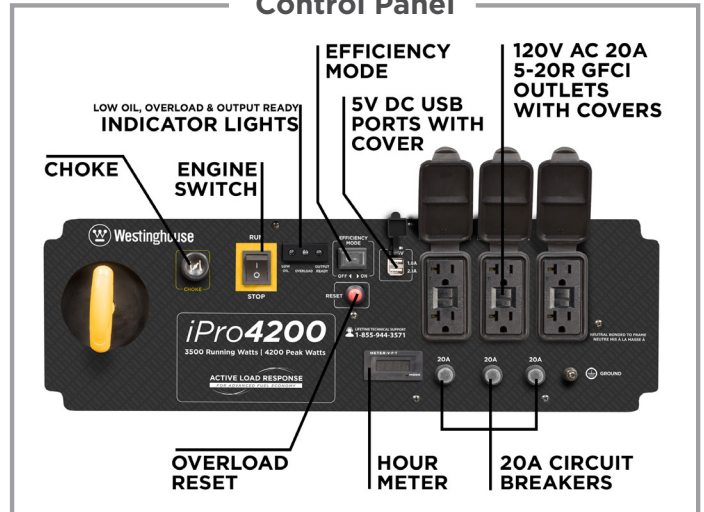

# iPro4200

## Open Frame Inverter Generator Specifications



Gasoline Peak Watts	4200
Gasoline Running Watts	3500
Peak Amps at 120V	35 amps
Running Amps at 120V	29 amps
AC Voltage	120 Volts
DC Voltage	5 Volts
AC Frequency	60 Hz
Parallel Capable	No
Engine Horse Power (HP)	5.8 HP
Total Harmonic Distortion (THD)	<3%
Automatic Voltage Regulator (AVR)	Yes
Starting System	Recoil
Battery Included	No
Engine Displacement	212cc
Engine Brand	Westinghouse
Engine Type	OHV 4 Stroke
Engine Speed	Variable
Engine RPM	Max 3800
Operational Volume	As low as 62 dBA
Spark Plug (included)	Torch F7TC
Carburetor Kit Required to Operate at Altitude	Yes
Altitude Carburetor Kit Number (sold separate)	140545
Economy Mode Switch	Yes
Built-in Inverter	Yes
Engine Lubrication	Splash
Recommended Oil	SAE 10W30
Oil Bottle Size (included)	.6 qt. (20.3 oz.)
Oil Capacity (Quarts/Ounces)	.6 qt. (20.3 oz.)
Low Oil Shutdown	Automatic
Fuel Type	Unleaded Gasoline, 10% Ethanol or less
Fuel Shut Off	Manual
Fuel Tank Material	Steel
Fuel Tank Capacity (Gallons/Liters)	4 gal. (15 L)
Run Time at %25 Load (hrs.)	22 hrs.
Run Time at %50 Load (hrs.)	16 hrs.
Gasoline Fuel Gauge	Yes
Choke type	Manual

AC Outlets	(3) Duplex 120V 20A GFCI (5-20R)
DC Outlets	(2) 5V USB ports
Ground	Neutral Bonded to Frame
Covered Outlets	Yes
Transfer Switch Ready	No
Westinghouse Portable Transfer Switch Ready	No
Volts, Frequency, Lifetime Hour Meter	Yes
GFCI Outlets	Yes
OSHA Compliant	Yes
LED Data Center	No
RV Ready Outlet	No
Overload Protection (circuit breaker)	Yes
Handle	No
Emissions	EPA, CARB
Canada CSA Compliant	No
Wheel Kit Included	No
Wheel Kit Ready	Yes
Muffler	Pulse-Flo™
Spark Arrestor	Yes
Residential Warranty	3 Years
Commercial Warranty	1 Year
Assembled Length in. (mm)	24 in. (609 mm)
Assembled Width in. (mm)	20.5 in. (520 mm)
Assembled Height in. (mm)	20 in. (508 mm)
Carton Length in. (mm)	25 in. (635 mm)
Carton Width in. (mm)	20 in. (508 mm)
Carton Height in. (mm)	20 in. (508 mm)
Dry Unit Weight lb. (kg)	82 lb. (37 kg)
Shipping Weight lb. (kg)	87 lb. (39 kg)
UPC	855464003735
GTIN	00855464003735

05302018KD

©2018 Westinghouse Outdoor Power Equipment  
Specifications are subject to change without notice  
Westinghouse Portable Power  
777 Manor Park Dr., Columbus, OH 43228

**Have questions? Contact our team  
at [service@wpowereq.com](mailto:service@wpowereq.com) or call  
855.944.3571**

