

# WINCO®

# DP5000

## FEATURES

### Honda GX270 Engine

You expect the best; you get the best. The Honda GX270 engine has more power, lower fuel consumption, and lower emissions than previous versions.

### Low Oil Protection

In the event there is low oil level, the engine will shut down, which will protect the engine from damage.

### Clean Power

This unit has less than 5% Total Harmonic Distortion, meaning that it is safe to run sensitive electronics.

### Full-Panel GFCI

The panel is fully GFCI protected and OSHA compliant.

### Sturdy Wrap-Around Welded Cradle

We use 1" tubular steel for dependable durability.

### 8 Gallon Fuel Tank

The EPA approved steel fuel tank design eliminates carbon emissions.


### 100% Load Tested

You won't find statistical sampling here. We load test every generator before it leaves our facility.

## DYNA®

### PROFESSIONAL

**5,000 Starting Watts**  
**4,560 Running Watts**

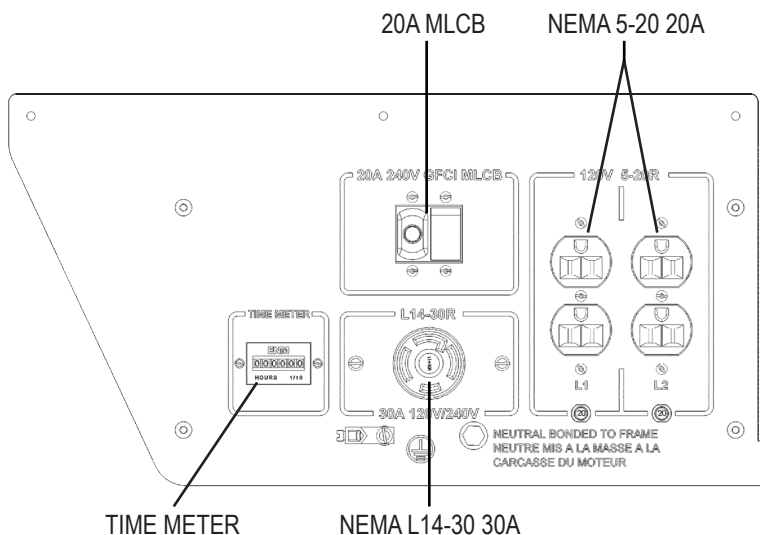

## OPTIONAL ACCESSORIES

### Two Wheel, Flat-Free Dolly Kit

Portability is important to get your generator where it needs to be.

### Generator Cover

When your generator is not in use, you will want to keep it dust and debris free.

### Plug-In Line 120 VAC Voltage Monitor

To verify the voltage output.

### Maintenance Kit

Keep the engine at its peak performance to ensure the generator will be ready when needed most.

### 30 Amp (NEMA L14-30P) Plug

You supply the length of cord you need. We offer the plug.

## GENERATOR

|                                   |                     |
|-----------------------------------|---------------------|
| STARTING WATTS                    | 5,000               |
| RUNNING WATTS                     | 4,560               |
| RUNNING AMPS @ 120 VAC            | 38                  |
| RUNNING AMPS @ 240 VAC            | 19                  |
| VOLTAGE REGULATION                | CAPACITOR +/-5%     |
| FREQUENCY REGULATION              | +/-3%               |
| MAIN CIRCUIT BREAKER              | 20 AMP              |
| NEUTRAL BONDED                    | YES                 |
| 120 VOLT RECEPTACLES              | (2) NEMA 5-20 20A   |
| 120/240 VOLT RECEPTACLES          | (1) NEMA L14-30 30A |
| GENERATOR WARRANTY <sup>(1)</sup> | 3 YRS COMMERCIAL    |

NOTES: (1) For more generator warranty information contact your local WINCO dealer.

## GENSET

|  |                |
|--|----------------|
| MOTOR STARTING (CODE G) <sup>(1)</sup> | 1.5 HP         |
| SOUND DATA <sup>(2)</sup> FULL LOAD    | 80.6           |
| LIFTING EYE <sup>(3)</sup>             | INCLUDED       |
| 2-WHEEL DOLLY KIT                      | OPTIONAL       |
| PROTECTIVE ROLL FRAME                  | 14 GAUGE STEEL |
| ASSEMBLED IN                           | USA            |
| EPA APPROVED                           | YES            |
| CARB APPROVED                          | YES            |
| CSA APPROVED                           | NO             |

UNIT WARRANTY<sup>(4)</sup> 3 YRS COMMERCIAL  
 NOTES: (1) Code G capacitor start motor. (2) All measurements are in db(a). Tested at 7 meters (23 ft.). (3) Lifting eye shipped loose. (4) For more generator warranty information contact your local WINCO dealer.

## ENGINE

|                                |                  |
|--------------------------------|------------------|
| ENGINE BRAND                   | HONDA            |
| ENGINE MODEL                   | GX270            |
| ENGINE STARTER                 | RECOIL           |
| ENGINE SPEED                   | 3600 RPM         |
| ENGINE CYLINDERS               | SINGLE           |
| DISPLACEMENT/TYPE              | 270 CC / OHV     |
| LOW OIL PROTECTION             | STANDARD         |
| RECOMMENDED OIL <sup>(1)</sup> | 10W-30           |
| OIL CAPACITY                   | 1.2 QTS          |
| FUEL TANK                      | 8 GAL            |
| FUEL GAUGE                     | ON TANK          |
| FULL LOAD RUN TIME             | 5 HOURS          |
| TIME METER                     | INCLUDED         |
| ENGINE WARRANTY <sup>(2)</sup> | 3 YRS COMMERCIAL |

NOTES: (1) This oil is recommended for most applications. See Operator's Manual for more details on the appropriate oil type for your needs. (2) Contact your local Honda service center for engine warranty assistance.

## DIMENSIONS



|            |                     |
|------------|---------------------|
| DIMENSIONS | 29" x 21.5" x 23.6" |
| NET WEIGHT | 156 LBS             |

NOTES: Dimensions are L x W x H. Add 4" height if lifting eye is installed. Add 6.5" to height and 7.5" width if dolly kit is installed.

## SHIPPING

|                     |                 |
|---------------------|-----------------|
| SHIPPING DIMENSIONS | 30" x 22" x 24" |
| SHIP WEIGHT         | 178 LBS         |
| FREIGHT CLASS       | 70              |

NOTES: Dimensions are L x W x H.

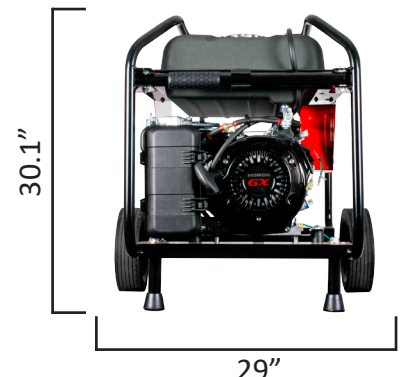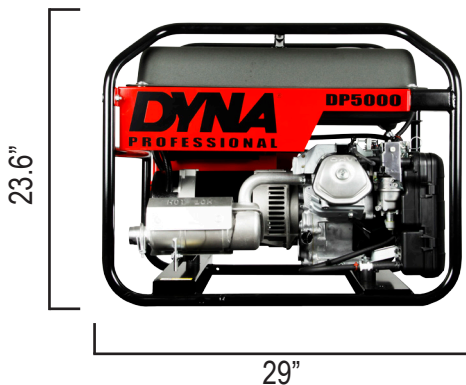

Specifications are subject to change without notice.  
 225 S. Cordova Ave Le Center MN • 1-800-733-2112 • www.wincogen.com