

## FEATURES

### Honda GX270 Engine

You expect the best; you get the best. The Honda GX270 engine has more power, lower fuel consumption, and lower emissions than previous versions.

### Low Oil Protection

In the event there is low oil level, the engine will shut down, which will protect the engine from damage.

### Clean Power

This unit has less than 5% Total Harmonic Distortion, meaning that it is safe to run sensitive electronics.

### Full-Panel GFCI

The panel is fully GFCI protected and OSHA compliant.

### Sturdy Wrap-Around Welded Cradle

We use 1" tubular steel for dependable durability.


### 8 Gallon Fuel Tank

The EPA approved steel fuel tank design eliminates carbon emissions.

### 100% Load Tested

You won't find statistical sampling here. We load test every generator before it leaves our facility.

## DYNA® PROFESSIONAL 5,000 Starting Watts 4,560 Running Watts

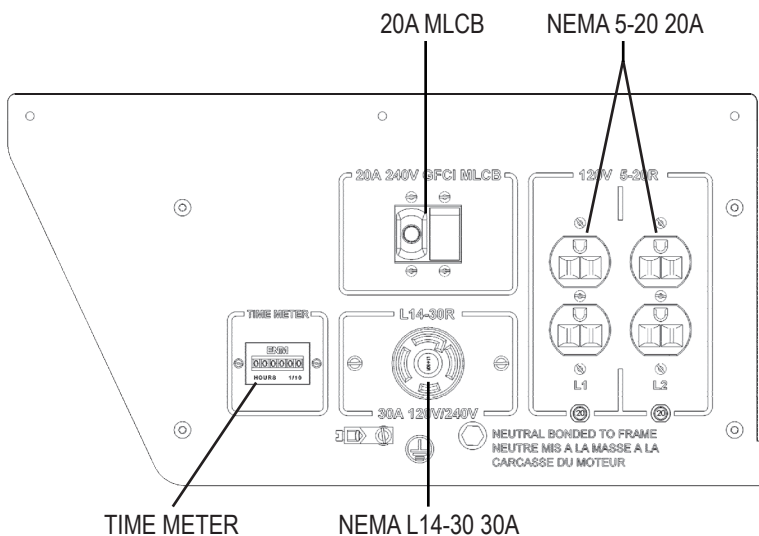

## OPTIONAL ACCESSORIES

### Two Wheel, Flat-Free Dolly Kit

Portability is important to get your generator where it needs to be.

### Generator Cover

When your generator is not in use, you will want to keep it dust and debris free.

### Plug-In Line 120 VAC Voltage Monitor

To verify the voltage output.

### WINCO Emergency Transfer Service Kit

You will be able to set up your generator quickly and safely to restore power to critical circuit breakers.

### 30 Amp (NEMA L14-30P) Plug

You supply the length of cord you need. We offer the plug.

## GENERATOR

STARTING WATTS	5,000
RUNNING WATTS	4,560
RUNNING AMPS	38/19
OUTPUT	120/240 VAC
VOLTAGE REGULATION	CAPACITOR +/-5%
FREQUENCY REGULATION	+/-3%
MAIN CIRCUIT BREAKER	20 AMP
NEUTRAL BONDED	YES
120 VOLT RECEPTACLES	(2) NEMA 5-20 20A
120/240 VOLT RECEPTACLES	(1) NEMA L14-30 30A
GENERATOR WARRANTY <sup>(1)</sup>	3 YRS COMMERCIAL

NOTES: (1) For more generator warranty information contact your local WINCO dealer.

## GENSET

MOTOR STARTING (CODE G) <sup>(1)</sup>	1.5 HP
SOUND DATA <sup>(2)</sup> FULL LOAD	80.6
LIFTING EYE <sup>(3)</sup>	INCLUDED
2-WHEEL DOLLY KIT	OPTIONAL
PROTECTIVE ROLL FRAME	14 GAUGE STEEL
ASSEMBLED IN	USA
EPA APPROVED	YES
CARB APPROVED	YES
CSA APPROVED	NO
UNIT WARRANTY <sup>(4)</sup>	3 YRS COMMERCIAL

NOTES: (1) Code G capacitor start motor. (2) All measurements are in db(a). Tested at 7 meters (23 ft.). (3) Lifting eye shipped loose. (4) For more generator warranty information contact your local WINCO dealer.

## ENGINE

ENGINE BRAND	HONDA
ENGINE MODEL	GX270
ENGINE STARTER	RECOIL
ENGINE SPEED	3600 RPM
ENGINE CYLINDERS	SINGLE
DISPLACEMENT/TYPE	370 CC / OHV
LOW OIL PROTECTION	STANDARD
RECOMMENDED OIL <sup>(1)</sup>	10W-30
OIL CAPACITY	1.2 QTS
FUEL TANK	8 GAL
FUEL GAUGE	ON TANK
FULL LOAD RUN TIME	5 HOURS
TIME METER	INCLUDED
ENGINE WARRANTY <sup>(4)</sup>	3 YRS

NOTES: (1) This oil is recommended for most applications. See Operator's Manual for more details on the appropriate oil type for your needs. (2) Code G capacitor start motor. (3) Battery not included (4) Contact your local Honda service center for engine warranty assistance.

## DIMENSIONS



DIMENSIONS	29" x 21.5" x 23.6"
NET WEIGHT	156 LBS

NOTES: Dimensions are L x W x H. Add 4" height if lifting eye is installed.

## SHIPPING

SHIPPING DIMENSIONS	30" x 22" x 24"
SHIP WEIGHT	178 LBS
FREIGHT CLASS	70

NOTES: Dimensions are L x W x H.

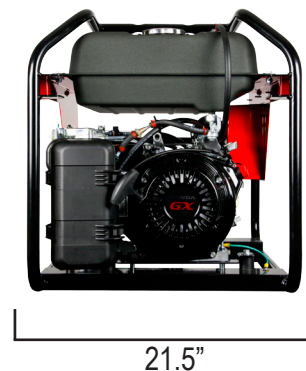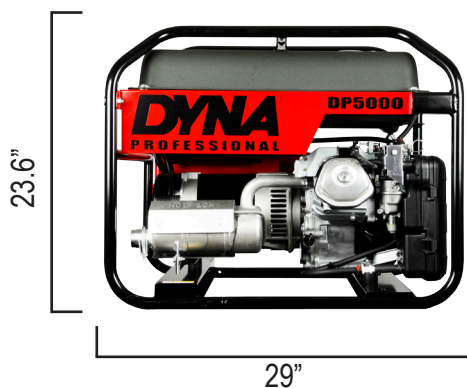

Specifications are subject to change without notice.

225 S. Cordova Ave Le Center MN • 1-800-733-2112 • www.wincogen.com