



# CX1400



CX1400

## CX POWER SERIES Portable Generators

1 of 2

### Features


- **Compact size** for easy maneuvering and storage.
- **Digital multi meter** tracks engine runtime for maintenance intervals.
- **Powermate OHV engine** provides consistent power for multiple applications.
- **Low-oil level shutdown** prevents engine damage.
- **Fuel gauge** allows user to keep track of gasoline levels.
- **Covered outlets** provide protection and keep out debris.
- **Ergonomic Frame** for easy portability.

Model PC0141400 UPC: 696471620641 (49 ST/CSA)



**AC Rated Output Running Watts 1400**  
**AC Maximum Output Starting Watts 1700**

### 49-State/CSA Control Panel

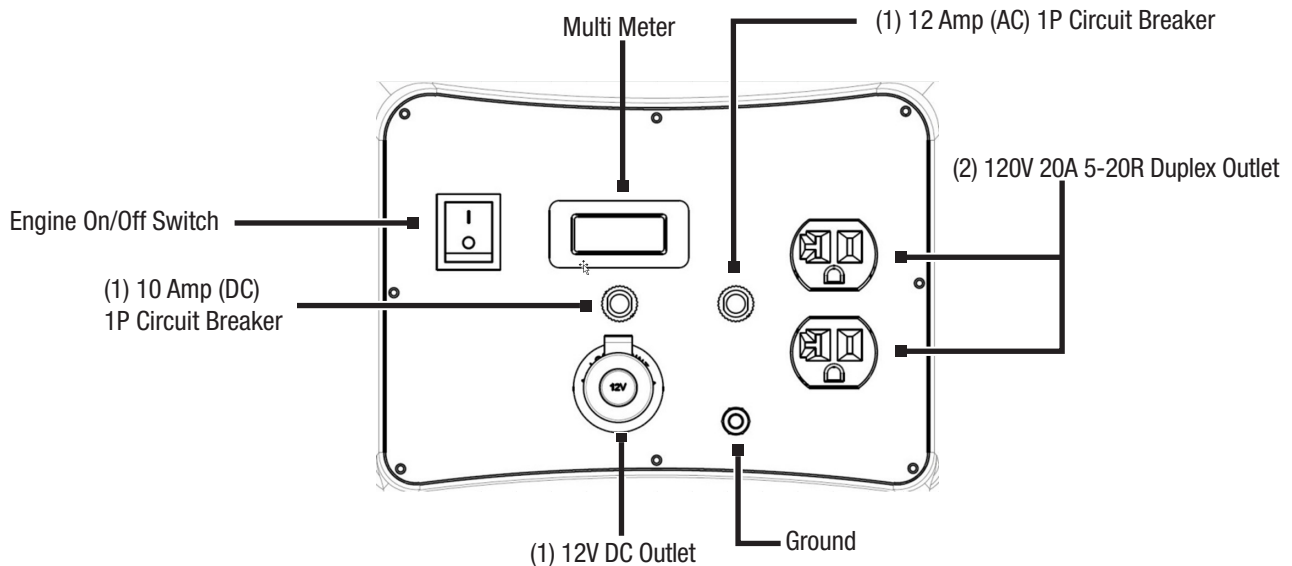

# CX1400

## Specifications

Product Series	CX1400
Model (Configuration)	PC0141400 (49 ST/CSA)
AC Rated Output Running Watts:	1400
AC Maximum Output Motor Starting Watts:	1700
AC Voltage	120VAC
AC Frequency	60 Hz
Rated VAC Amperage	11.6
Engine Displacement	98cc
Engine Type	OHV
Engine RPM	3600
Recommended Oil	SAE 10W-30
Lubrication Method	Splash
Automatic Voltage Regulation (AVR)	Yes
Choke Location	On Engine
Fuel Shut Off	On Fuel Tank
Starting Method	Recoil Pull Start
Low Oil Shutdown Method	Low Level
Neutral Bonded to Ground	Yes
Start Switch Type	On/Off Switch
Engine On/Off Location	On Control Panel

Fuel Gauge	Built-In Tank
Fuel Tank Capacity Gal (Ltrs)	1.5 (5.7)
Run Time at 50% (Hours)	8.5
Warranty - Residential	2 Year Ltd
Warranty - Commercial	1 Year Ltd

## Dimensions and Weights

Length in (mm)	19.8 (502)
Width in (mm)	15.6 (396)
Height in (mm)	15.9 (404)
Carton Length in (mm)	20.9 (530)
Carton Width in (mm)	16.5 (420)
Carton Height in (mm)	17.5 (445)
Unit Weight lbs (kg)	60 (27.2)
Shipping Weight lbs (kg)	65.5 (29.7)

