



ISO 9001
KOHLER
 POWER SYSTEMS
 NATIONALLY REGISTERED




Standard Features

- **Pro-Grade Engine.**
 This portable generator is powered by a KOHLER Command PRO® engine, ready to start in the toughest environments.
- **Easy Refills**
 Accu-Fill™ feature provides safe, easy refilling – and less spilling – with angled fuel inlet.
- **Extra Engine Protection**
 Oil Sentry™ automatically shuts engine down in low-oil conditions.
- **3-Year Residential Warranty**
 You get our 3-year residential limited warranty, backed by a network of more than 10,000 dealers.*
- **Included U-Spec™ Accessories**
 Wheel kit, leg kit, and wheelbarrow handle kit

The KOHLER Advantage

- **Built to Last Since 1920**
 For over 90 years, hospitals, airports and military bases around the world have depended on KOHLER generators.
- **Premium Warranty**
 You get our premium 3-year limited warranty backed by a network of more than 10,000 dealers.

Control Panel

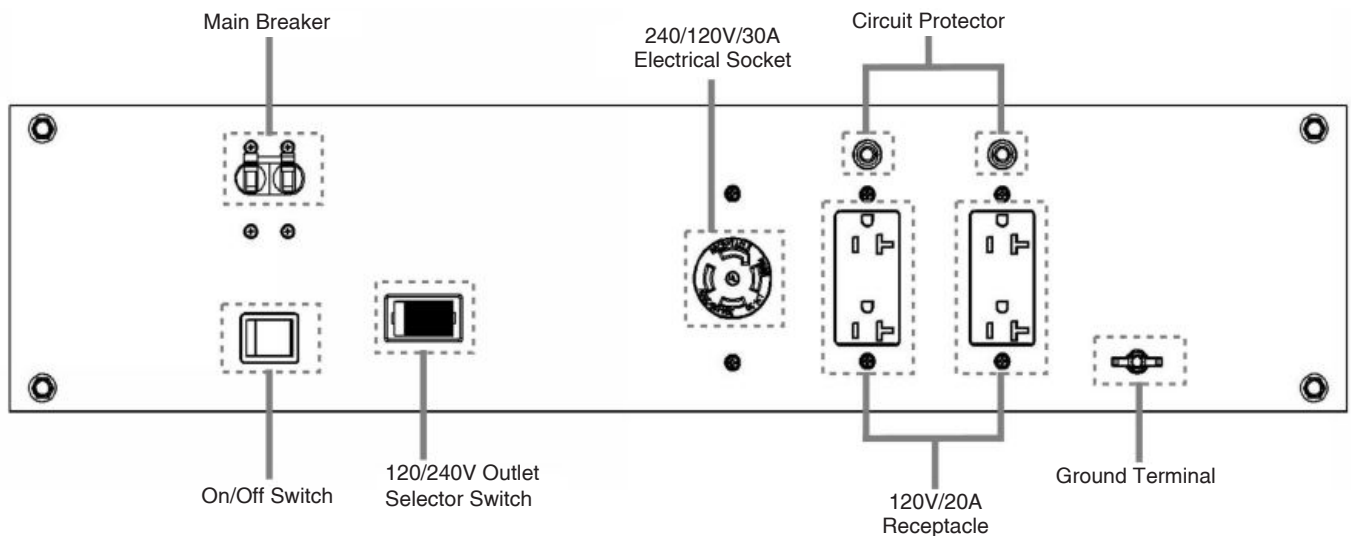

* 90-day warranty if used in professional conditions.

Specifications


Model Name	GEN5.0
Model spec	PA-GEN50-2003 PA-GEN50-3003
Compliance	EPA 49-state (2003 Spec only) EPA/CARB 50-state (3003 Spec only) CSA (All Specs)
AC rated output (running watts)	4,300
AC maximum output (motor starting watts)	5,000
AC voltage	120/240
AC frequency (Hz)	57.5-63
Total Harmonic Distortion	≤ 20%
Rated VAC amperage	35.8/17.9
Max rated amperage	41.7/20.8
Engine displacement	277 cc
Fuel type	Gasoline
Engine RPM	3600
Recommended oil	SAE30
Automatic voltage regulation	Yes
Choke location	Manual on engine
Fuel shut off	In tank w/filter
Starting method	Recoil only
Low oil shutdown method	Low level
Neutral	Floating Neutral
Start switch type	Toggle Type Off-On (Red)
Switch location	On control panel
Fuel gauge	Yes
Fuel tank capacity	8 gal/30 liters
Run time @ 50% (hours)	16
Warranty - Residential	3 years
Warranty - Commercial	90 Days

Available U-Spec™ Accessory System Options

- Auto-Locking Hand Truck Handle Kit
- Lifting Kit
- Extension Cord Management Kit
- Isolator Kit

Generator Set Dimensions and Weights

A mm (in.): 747 (29.4)	Carton Length mm (in.): 777 (30.5)
B mm (in.): 544 (21.4)	Carton Width mm (in.): 572 (22.5)
C mm (in.): 566 (22.3)	Carton Height mm (in.): 599 (23.6)
D mm (in.): 1219 (48)	Shipping Weight lbs (kg): 189 (86)
E mm (in.): 762 (30)	
F mm (in.): 114 (4.5)	
G mm (in.): 140 (5.5)	
Unit Weight lbs (kg): 180 (82)	

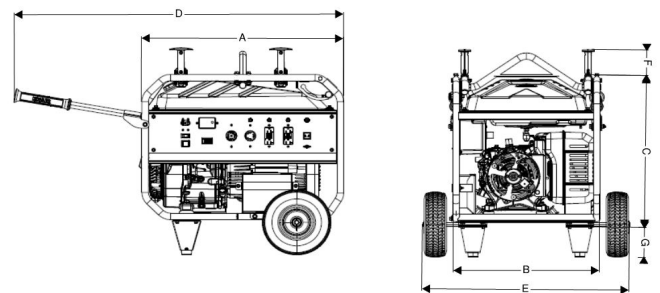

NOTE: Dimensions are provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

Availability is subject to change without notice. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

DISTRIBUTED BY: